



Figure similar

MLFB-Ordering data

6SL3210-1PE32-1AL0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.95
Number of phases	3 AC	Offset factor $\cos \varphi$	0.99
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.99
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	68 dB
Rated current (LO)	198.00 A	Power loss	2.17 kW
Rated current (HO)	189.00 A	Filter class (integrated)	Class A
Output		Ambient conditions	
Number of phases	3 AC	Cooling	Internal air cooling
Rated voltage	400 V	Cooling air requirement	0.153 m ³ /s (5.403 ft ³ /s)
Rated current (LO)	205.00 A	Installation altitude	1000 m (3280.84 ft)
Rated current (HO)	178.00 A	Ambient temperature	
Max. output current	356.00 A	Operation LO	-20 ... 40 °C (-4 ... 104 °F)
Rated power IEC 400V (LO)	110.00 kW	Operation HO	-20 ... 50 °C (-4 ... 122 °F)
Rated power NEC 480V (LO)	150.00 hp	Transport	-40 ... 70 °C (-40 ... 158 °F)
Rated power IEC 400V (HO)	90.00 kW	Storage	-40 ... 70 °C (-40 ... 158 °F)
Rated power NEC 480V (HO)	125.00 hp	Relative humidity	
Pulse frequency	2 kHz	Max. operation	95 % RH, condensation not permitted
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM240-2




Figure similar

MLFB-Ordering data

6SL3210-1PE32-1AL0

Mechanical data	Connections
Degree of protection	Line side
Size	Version
Net weight	Conductor cross-section
Width	Motor end
Height	Version
Depth	Conductor cross-section

Converter losses to EN 50598-2*
Efficiency class
Comparison with the reference converter (90% / 100%)

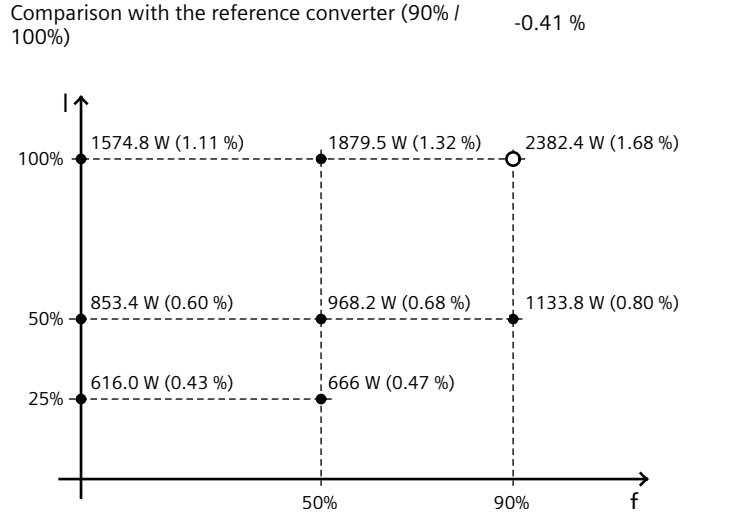

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

DC link (for braking resistor)
Version
Conductor cross-section
Cable length
PE connection
Max. motor cable length
Shielded
Unshielded

Standards
Compliance with standards

CE marking	Low-voltage directive 2006/95/EC
------------	----------------------------------