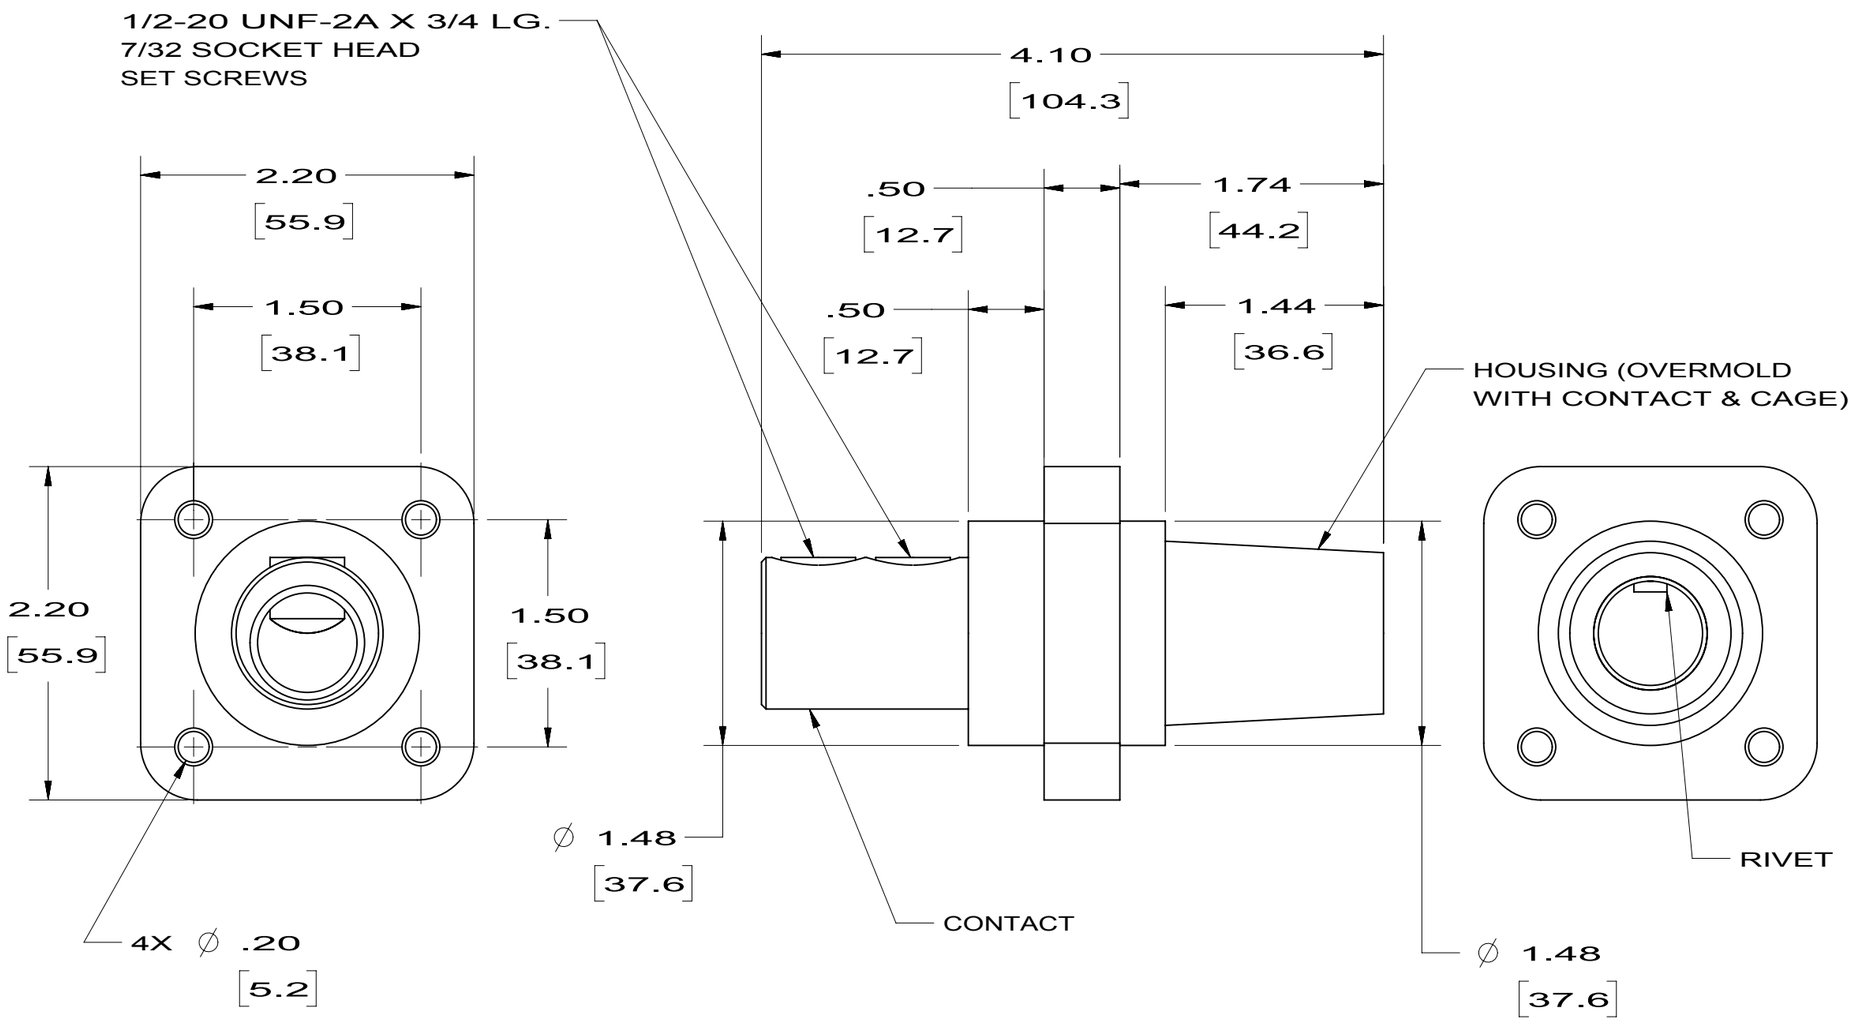

NOTES:

1. DIMENSIONS ARE INCHES ± .02
   [mm] ± .5
2. RATING: 600V 400 AMP.
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12, SEE INSTRUCTION SHEET.
4. CABLE SIZE #4 AWG - 4/0, COPPER ONLY.
5. LEAD WIRE & COPPER SHEET NOT SHOWN.

HUBBELL CAT. NO.	COLOR
HBLFRBK	BLACK
HBLFRW	WHITE
HBLFRGN	GREEN
HBLFRR	RED
HBLFRBL	BLUE
HBLFRO	ORANGE
HBLFRBN	BROWN
HBLFRY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
CONTACT	BRASS	
RIVET	BRASS	
CAGE	NYLON	BLACK
SET SCREW	STEEL	
LEAD WIRE	COPPER	
COPPER SHEET	COPPER	



CATALOG NO. HBLFRBK
(NOT SHOWN TO SCALE)

SYM	REVISIONS	APP	DATE
5	REVISED NOTE 2 FROM 600VAC/250VDC TO 600V PER DCN 23410 RGP	RGP	11/01/17
4	REDRAWN WITH EMBEDDED CAD MODEL WITH NO CHANGES TO PART GEOMETRY PER DCN 21895 SPN	DJP	2/5/16

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SINGLE POLE FEMALE RECEPTACLE W/DOUBLE SET SCREW

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX = ± .005
ANGLES = ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	MJM	APP. BY	TWB
TR. BY		SCALE	1:1
CHK. BY	TWB	DATE	6/11/2003

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☐

B

M-8924

5

CODE 74545