



wire connector for 2 cables; 3 pcs. accessory for: 3VA55/3VA65/3VA66

Model	
product brand name	SENTRON
product designation	accessories
General technical data	
designation / of the terminal	TA3.1
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / stranded / minimum • for copper cable / stranded / maximum • for aluminum cable / stranded / minimum • for aluminum cable / stranded / maximum 	120 mm ² 300 mm ² 120 mm ² 300 mm ²
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / stranded / maximum • for copper cable / finely stranded / maximum • for aluminum cable / stranded / maximum 	600 kcmil 600 kcmil 600 kcmil

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9573-0JB23>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3VA9573-0JB23>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9573-0JB23

Tender specifications

<http://www.siemens.com/specifications>

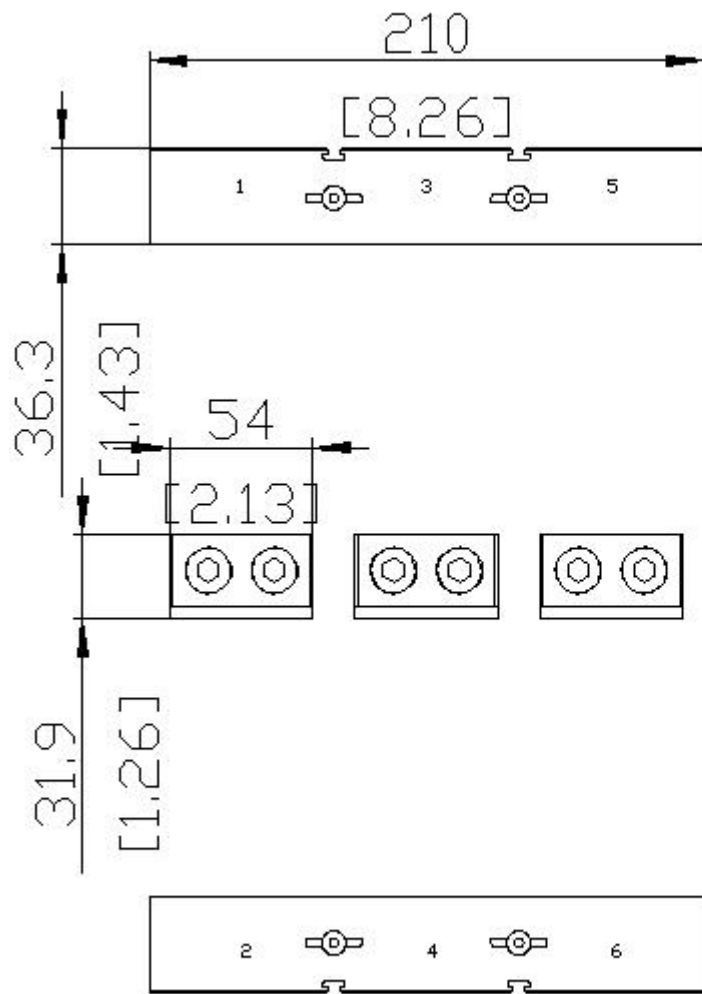

last modified:

3/11/2021 