



wire connector for 4 cables; with control wire tap 3 pcs. accessory for: 3VA55/3VA65/3VA66

Model	
product brand name	SETRON
product designation	accessories
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	120 mm <sup>2</sup> 300 mm <sup>2</sup> 120 mm <sup>2</sup> 300 mm <sup>2</sup>
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / maximum</li> <li>for copper cable / finely stranded / maximum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	600 kcmil 600 kcmil 600 kcmil

**Further information**




**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9673-0JC44>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9673-0JC44>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9673-0JC44](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9673-0JC44)

**Tender specifications**  
<http://www.siemens.com/specifications>

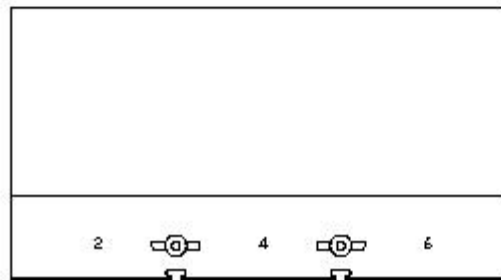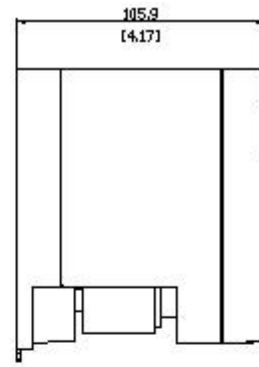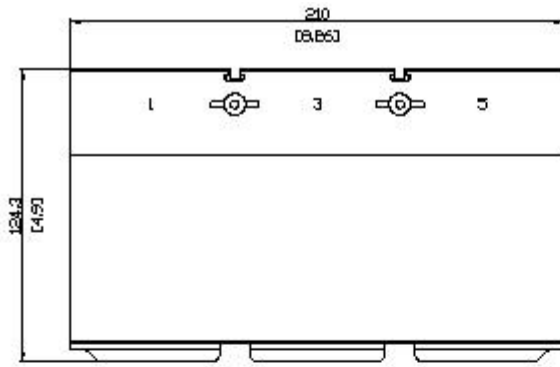

last modified:

3/11/2021 