





Wire Connector with control wire tap; for 2 cables; 3 pcs.; incl.  
Terminal Cover Extended with probe holes for voltage test;  
accessory for: 3VA5 250



Model	
Product brand name	SENTRON
Product designation	accessories
Connections according IEC	
IEC-marking / of terminals	25-150 mm <sup>2</sup> CU/AL NNL
Connectable conductor cross-section	<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum 25 mm<sup>2</sup></li> <li>• for copper cable / stranded / maximum 150 mm<sup>2</sup></li> <li>• for aluminum cable / stranded / minimum 25 mm<sup>2</sup></li> <li>• for aluminum cable / stranded / maximum 150 mm<sup>2</sup></li> </ul>
Wire stripping length	25 / 50 mm
Tightening torque / when using copper cables	<ul style="list-style-type: none"> <li>• stranded 31</li> </ul>
Connections according UL	

UL-marking / of terminals	TA2.3 CMC 4-300 CU7AL UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Wire stripping length	1.0 / 2.0 in
Connectable conductor cross-section <ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> <li>• for copper cable / stranded / maximum</li> <li>• for copper cable / finely stranded / minimum</li> <li>• for copper cable / finely stranded / maximum</li> <li>• for aluminum cable / stranded / minimum</li> <li>• for aluminum cable / stranded / maximum</li> </ul>	4 AWG 300 kcmil 4 AWG 300 kcmil 4 AWG 300 kcmil
Tightening torque / when using copper cables <ul style="list-style-type: none"> <li>• stranded</li> <li>• finely stranded</li> </ul>	275 lb-in 275 lb-in

## Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
<a href="#">Miscellaneous</a> 	 RCM	 EG-Konf.	 LRS	<a href="#">Manufacturer Declaration</a>

## other

[Miscellaneous](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9233-0JC28>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JC28>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9233-0JC28](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9233-0JC28)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

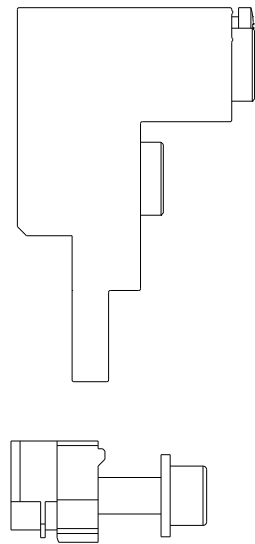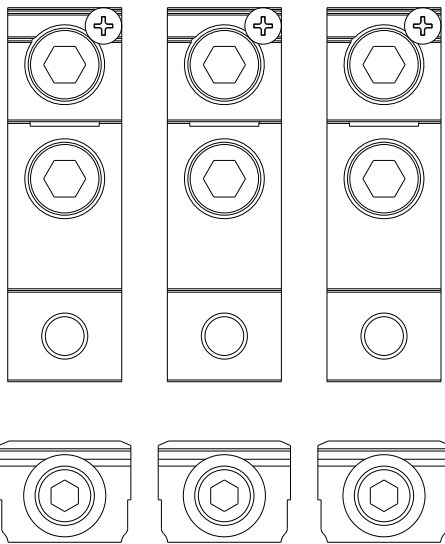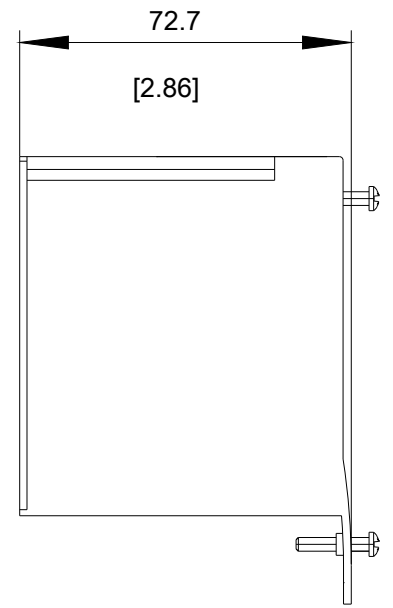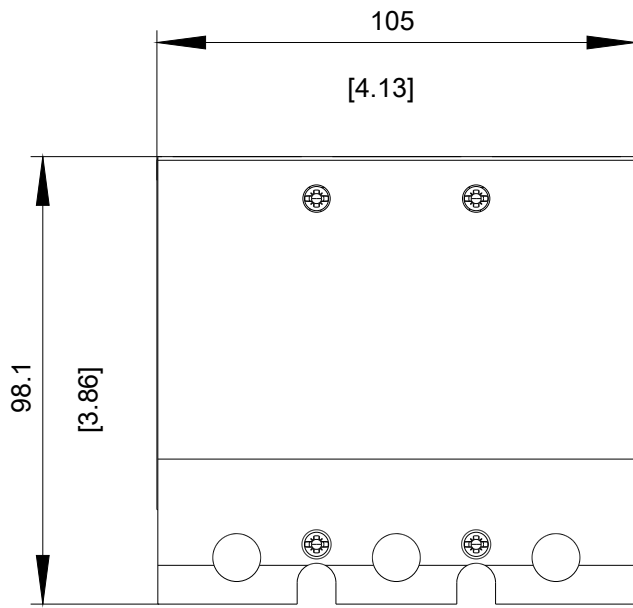

**last modified:**

11/19/2019