



wire connector for 2 cables; with control wire tap 3 pcs. accessory for: 3VA55/3VA65/3VA66

Model			
product brand name	SETRON		
product designation	accessories		
Voltage			
Current			
Mechanical Design			
Connections according IEC			
connectable conductor cross-section			
<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> <li>• for copper cable / stranded / maximum</li> <li>• for aluminum cable / stranded / minimum</li> <li>• for aluminum cable / stranded / maximum</li> </ul>	<ul style="list-style-type: none"> <li>240 mm<sup>2</sup></li> <li>300 mm<sup>2</sup></li> <li>240 mm<sup>2</sup></li> <li>300 mm<sup>2</sup></li> </ul>		
Connections according UL			
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C		
Certificates			
General Product Approval	EMC	Declaration of Conformity	Shipping Approval



[Miscellaneous](#)



other

[Manufacturer Declaration](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3VA9673-0JC24>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3VA9673-0JC24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9673-0JC24](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9673-0JC24)

Tender specifications

<http://www.siemens.com/specifications>

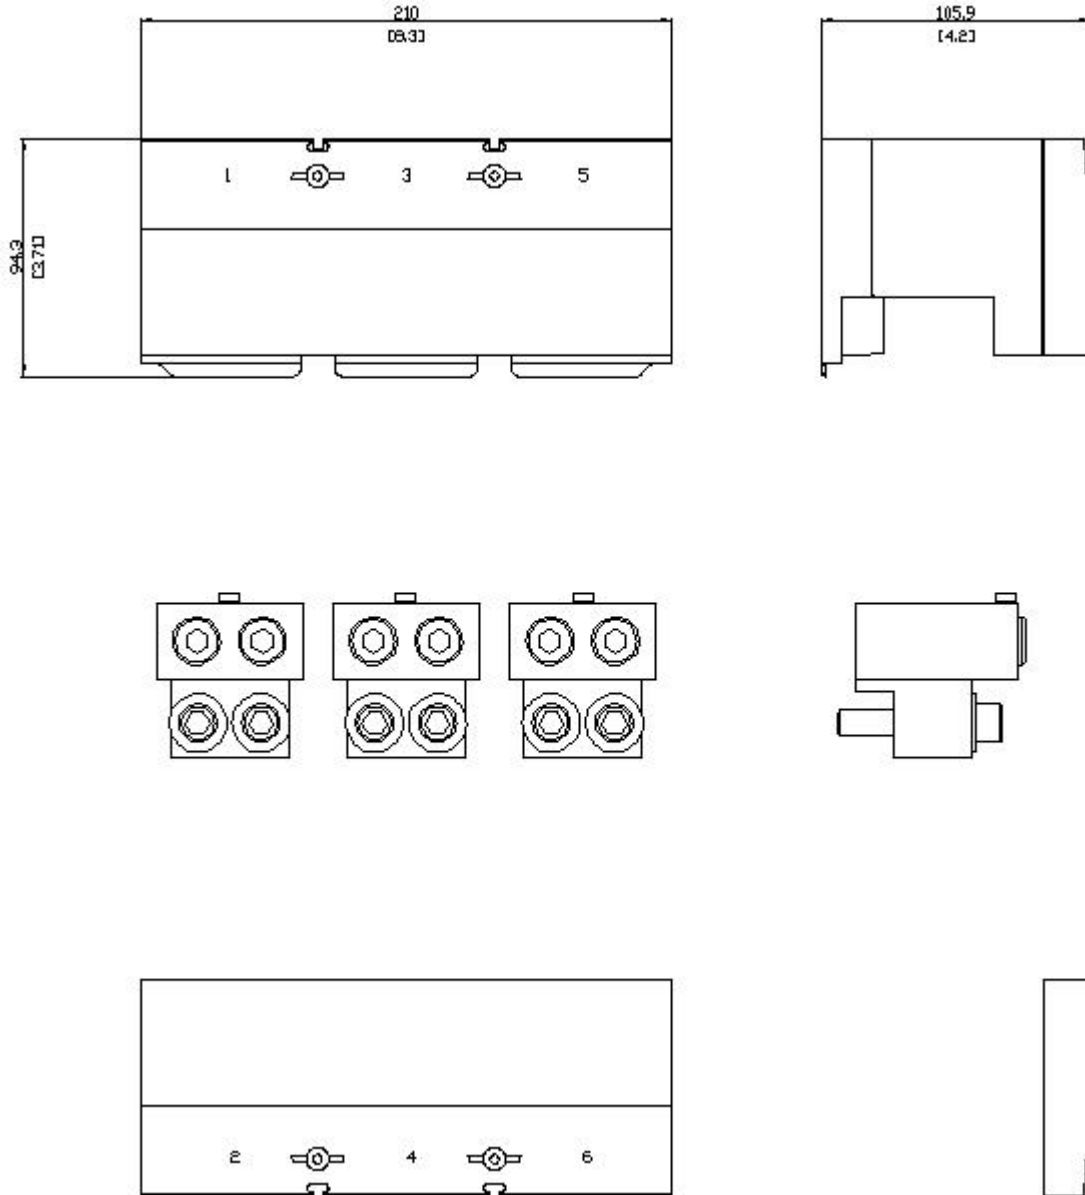

last modified:

12/20/2020 