



4-conductor ground terminal block; suitable for Ex e II applications

Item No.: 2002-1407



4-conductor ground terminal block; suitable for Ex e II applications

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	2002-1407
GTIN / EAN	4017332999311
Content	1
Order amount	100
Customer item number	

Notes



Technical data


Miscellaneous

Packaging type	BOX
Ratings per	IEC/EN 60947-7-2
Total number of potentials	1
Type of wiring	Front-entry wiring
Number of levels	1
Connection technology	Push-in CAGE CLAMP®

Technical data	
<i>Number of connection points (connection type)</i>	4
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Nominal cross section</i>	2.5 mm ²
<i>Solid conductor</i>	0.25 ... 4 mm ² / 22 ... 12 AWG
<i>Solid conductor, push-in termination</i>	0.75 ... 4 mm ² / 18 ... 12 AWG
<i>Fine-stranded conductor</i>	0.25 ... 4 mm ² / 22 ... 12 AWG
<i>Fine-stranded conductor with ferrule, push-in termination, f</i>	0.75 mm ² / 18 AWG
<i>Strip length</i>	10 ... 12 mm / 0.39 ... 0.47 Inch
<i>Width</i>	5.2 mm / 0.205 Inch
<i>Height from upper-edge of DIN-35 rail</i>	32.9 mm / 1.295 Inch
<i>Depth</i>	69.9 mm / 2.752 Inch
<i>Design</i>	<i>horizontal</i>
<i>Type of mounting</i>	<i>Carrier rail 35 x 15</i>
<i>Total number of connection points</i>	4
<i>Marking level</i>	<i>Center/side marking</i>
<i>Color</i>	<i>green-yellow</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	0.118 [MJ]
<i>RoHS Conformity</i>	1
<i>Weight [g]</i>	10.1 [g]

Images & drawings

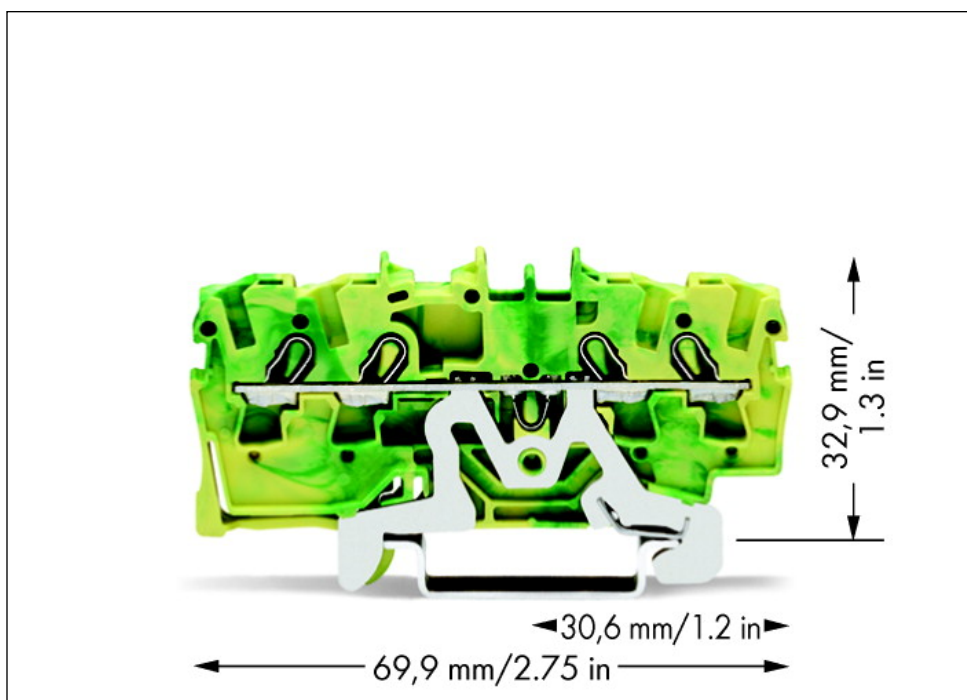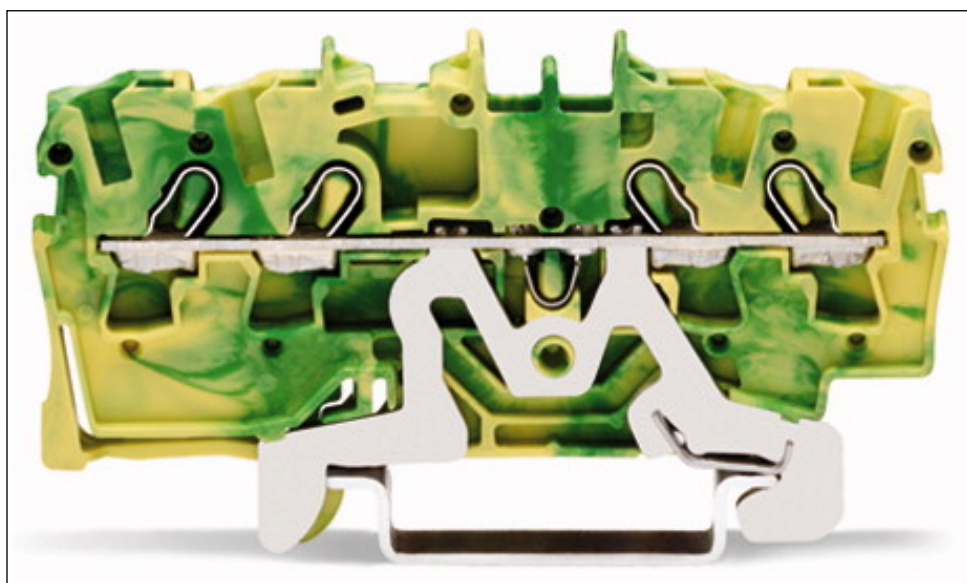

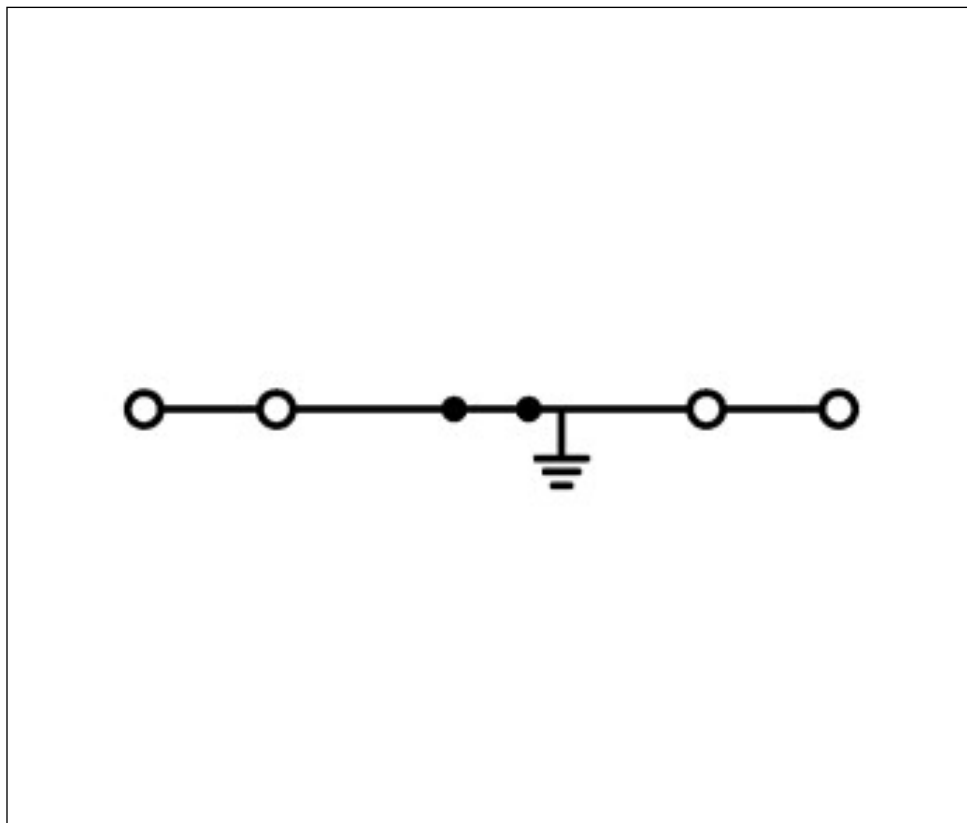

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.