




3-conductor through terminal block; suitable for Ex e II applications

Item No.: 2016-1301



3-conductor through terminal block; suitable for Ex e II applications

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	2016-1301
GTIN / EAN	4017332076715
Content	1
Order amount	20
Customer item number	

Notes



Technical data


Miscellaneous

Packaging type	BOX
Ratings per	IEC/EN 60947-7-1
Rated voltage (III / 3) [V]	800 [V]
Rated impulse voltage (III / 3) [kV]	8 [kV]
Rated current [A]	76 [A]
Rated current (2) [A]	90 [A]

Technical data	
Rated voltage EN (Ex e II) [V]	550 [V]
Rated current (Ex e II) [A]	67 [A]
Rated current (Ex e II) with jumper [A]	65 [A]
Total number of potentials	1
Type of wiring	Front-entry wiring
Number of levels	1
Connection technology	Push-in CAGE CLAMP®
Number of connection points (connection type)	3
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross section	16 mm ²
Solid conductor	0.5 ... 16 mm ² / 20 ... 6 AWG
Solid conductor, push-in termination	2.5 ... 16 mm ² / 14 ... 6 AWG
Fine-stranded conductor	0.5 ... 25 mm ² / 20 ... 4 AWG
Fine-stranded conductor with ferrule, push-in termination, f	2.5 mm ² / 14 AWG
Strip length	18 ... 20 mm / 0.71 ... 0.79 Inch
Width	12 mm / 0.472 Inch
Height from upper-edge of DIN-35 rail	36.9 mm / 1.453 Inch
Depth	91.8 mm / 3.622 Inch
Design	horizontal
Type of mounting	Carrier rail 35 x 15
Total number of connection points	3
Marking level	Center/side marking
Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load [MJ]	0.454 [MJ]
RoHS Conformity	1
Weight [g]	29.7 [g]

Images & drawings

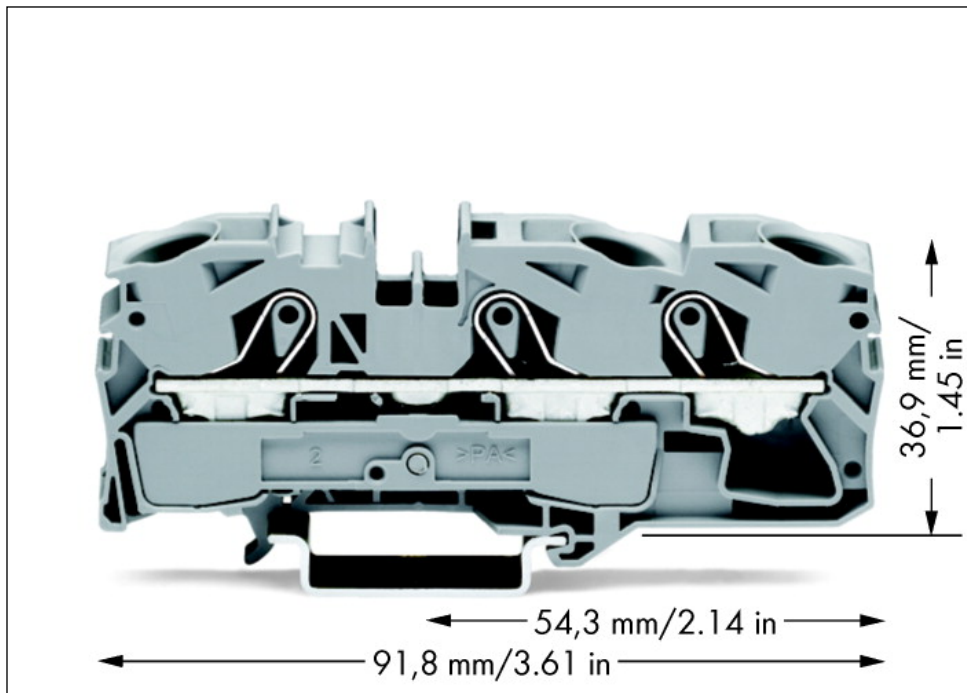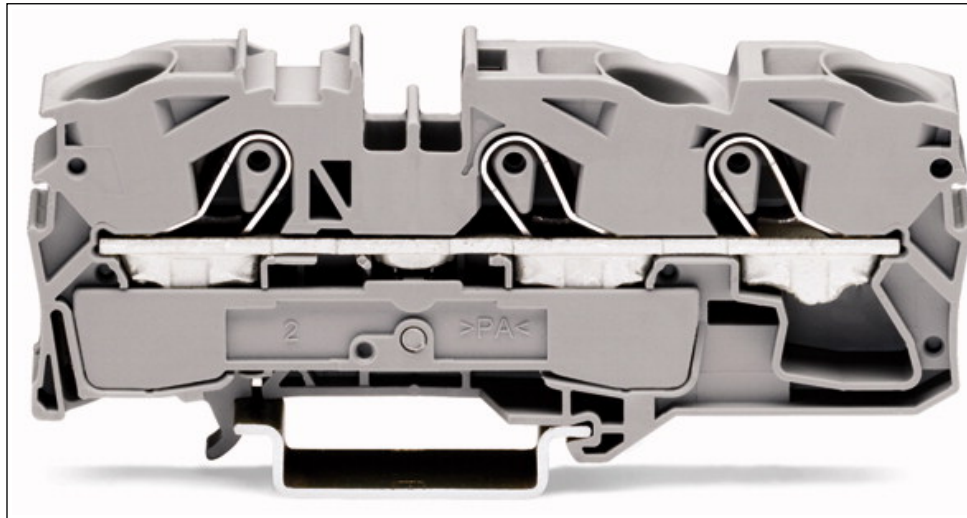

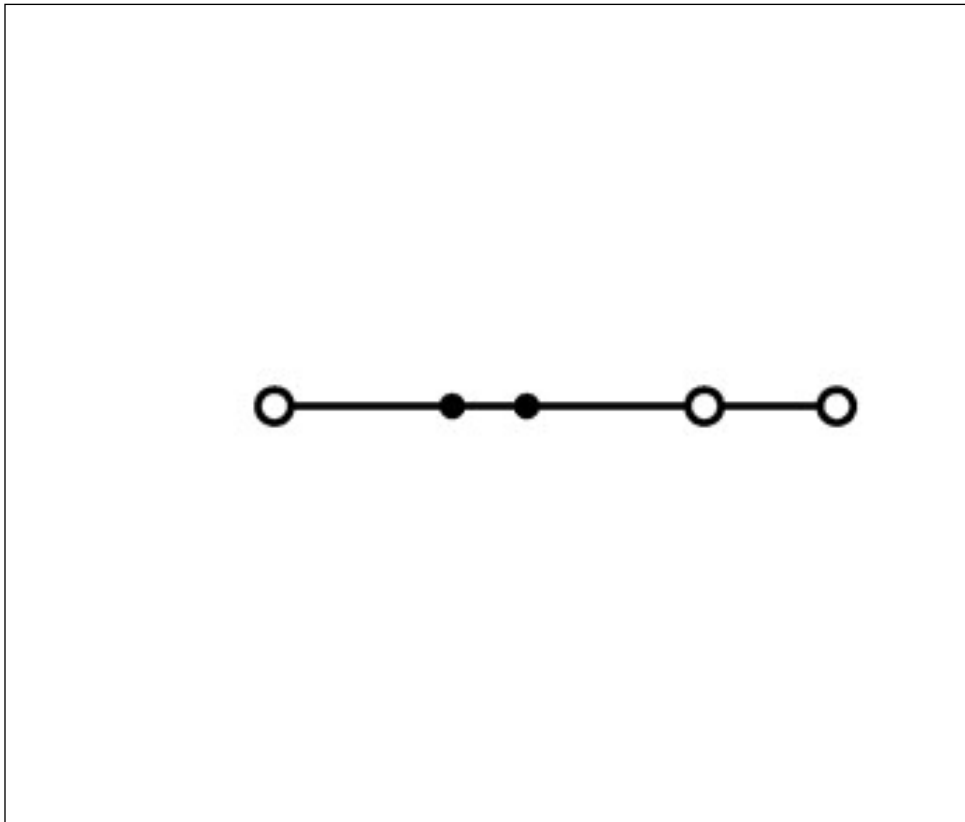

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.