

HDC-CR24-7S GR**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

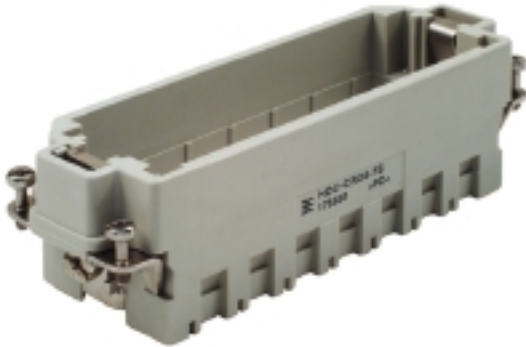

The sturdy CR24 module frames are available in polycarbonate or die-cast zinc.

The frames are designed so that 7 individual modules or corresponding double modules can be installed. ??? dementsprechende The CR24 frames are designed to fit the size-8 housings.

General ordering data

Version	Heavy-duty connectors, HDC insert, ConCept frame
Order No.	1758500000
Type	HDC-CR24-7S GR
GTIN (EAN)	4032248019724
Qty.	5 pc(s).

HDC-CR24-7S GR

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Depth	111 mm	Depth (inches)	4.37 inch
Height	35 mm	Height (inches)	1.378 inch
Width	34 mm	Width (inches)	1.339 inch
Net weight	49.34 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Environmental Product Compliance

REACH SVHC	Potassium perfluorobutane sulfonate 29420-49-3	SCIP	2f94735a-9fba-4903-842f-4fb9aa902
------------	--	------	-----------------------------------

ConCept Pneumatic module

Colour	beige	UL 94 flammability rating	V-0
--------	-------	---------------------------	-----

Dimensions

Height of plug	35 mm	Total length base	111 mm
Width	34 mm		

General data

BG	8	Material	Polycarbonate
Number of poles	1	Series	ConCept frame
Size	8	Type	Pin
UL 94 flammability rating	V-0		

Connection data PE

Connection type PE	Screw connection	Tightening torque, max. PE connection	1.5 Nm
Tightening torque, min. PE connection	1.2 Nm		

Version

BG	8	Material	Polycarbonate
Size	8	Wire connection cross section AWG, max.	AWG 14

Classifications

ETIM 6.0	EC002312	ETIM 7.0	EC002312
ETIM 8.0	EC002312	ECLASS 9.0	27-44-02-06
ECLASS 9.1	27-44-02-06	ECLASS 10.0	27-44-02-06
ECLASS 11.0	27-44-02-06	ECLASS 12.0	27-44-02-92

HDC-CR24-7S GR

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS

Conform

Downloads

Engineering Data	CAD data – STEP
Engineering Data	WSCAD
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN