



Product Information Packet

EJMM3709T

7.5HP,3520RPM,3PH,60HZ,213JM,3728M,TEFC

Part Detail							
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	37WGL869	CD Diagram:	CD0005	Mfg Plant:	
Mech. Spec:	37M031	Layout:	37LYM031	Poles:	02	Created Date:	11-18-2020
Base:	RG	Eff. Date:	08-16-2022	Leads:	9#14		

Specs			
Catalog Number:	EJMM3709T	Front Shaft Indicator:	None
Enclosure:	TEFC	Heater Indicator:	No Heater
Frame:	213JM	Insulation Class:	F
Frame Material:	Steel	Inverter Code:	Inverter Ready
Motor Letter Type:	Three Phase	KVA Code:	J
Output @ Frequency:	7.500 HP @ 60 HZ	Lifting Lugs:	Standard Lifting Lugs
Synchronous Speed @ Frequency:	3600 RPM @ 60 HZ	Locked Bearing Indicator:	Locked Bearing
Voltage @ Frequency:	460.0 V @ 60 HZ	Motor Lead Quantity/Wire Size:	9 @ 14 AWG
	230.0 V @ 60 HZ	Motor Lead Exit:	Ko Box
	208.0 V @ 60 HZ	Motor Lead Termination:	Flying Leads
XP Class and Group:	None	Motor Type:	3728M
XP Division:	Not Applicable	Mounting Arrangement:	F1
Agency Approvals:	CSA	Power Factor:	84
	CSA EEV	Product Family:	General Purpose
	UR	Pulley End Bearing Type:	Ball
Auxillary Box:	No Auxillary Box	Pulley Face Code:	C-Face
Auxillary Box Lead Termination:	None	Pulley Shaft Indicator:	Tapped & Key
Base Indicator:	Rigid	Rodent Screen:	None

Bearing Grease Type:	Polyrex EM (-20F +300F)	Shaft Extension Location:	Pulley End
Blower:	None	Shaft Ground Indicator:	No Shaft Grounding
Current @ Voltage:	19.000 A @ 208.0 V	Shaft Rotation:	Reversible
	9.000 A @ 460.0 V	Shaft Slinger Indicator:	Shaft Slinger
	18.000 A @ 230.0 V	Speed Code:	Single Speed
Design Code:	A	Motor Standards:	NEMA
Drip Cover:	No Drip Cover	Starting Method:	Direct on line
Duty Rating:	CONT	Thermal Device - Bearing:	None
Electrically Isolated Bearing:	Not Electrically Isolated	Thermal Device - Winding:	None
Feedback Device:	NO FEEDBACK	Vibration Sensor Indicator:	No Vibration Sensor
Front Face Code:	Standard	Winding Thermal 1:	None
		Winding Thermal 2:	None

Nameplate NP3441LUA

CAT.NO.	EJMM3709T													
SPEC	37M031L869G1													
HP	7.5													
VOLTS	208-230/460													
AMPS	19-18/9													
RPM	3520													
FRAME	213JM				HZ 60				PH	3				
SF	1.15			CODE	J	DES A			CLASS	F				
NEMA NOM. EFF	89.5			PF	84									
RATING	40C AMB-CONT													
CC	010A			USABLE AT 208V										
ENCL	TEFC			SER										
DE	6309			ODE		6206								
VPWM INVERTER READY														
CT6-60H(10:1)VT3-60H(20:1														
50HZ 7.5HP 190/380V 22/11.0A										SF1.0				

AC Induction Motor Performance Data

Record # 85603


Preliminary Data Sheet


Winding: 37WGL869-R001				Type: 3728M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5		Full Load Torque		11.2 LB-FT	
Volts		208-230/460		Start Configuration		direct on line	
Full Load Amps		19-18/9		Breakdown Torque		40.3 LB-FT	
R.P.M.		3520		Pull-up Torque		19.7 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		21.8 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		68.4 A
Service Factor (S.F.)		1.15		No-load Current		3.52 A	
NEMA Nom. Eff.		89.5	Power Factor	84	Line-line Res. @ 25°C		1.19 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C	
S.F. Amps		21-20/10		Temp. Rise @ S.F. Load		63°C	
				Locked-rotor Power Factor		38.1	
				Rotor inertia		0.255 lb-ft²	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	71	81	86	88	89	87
Efficiency	83.9	89.7	91	90.9	90.2	89.2	90.3
Speed	3580	3560	3540	3518	3494	3468	3500
Line amperes	4.1	5.4	7.06	8.96	11	13.2	10.2

Performance Graph at 460V, 60Hz, 7.5HP Typical performance - Not guaranteed values

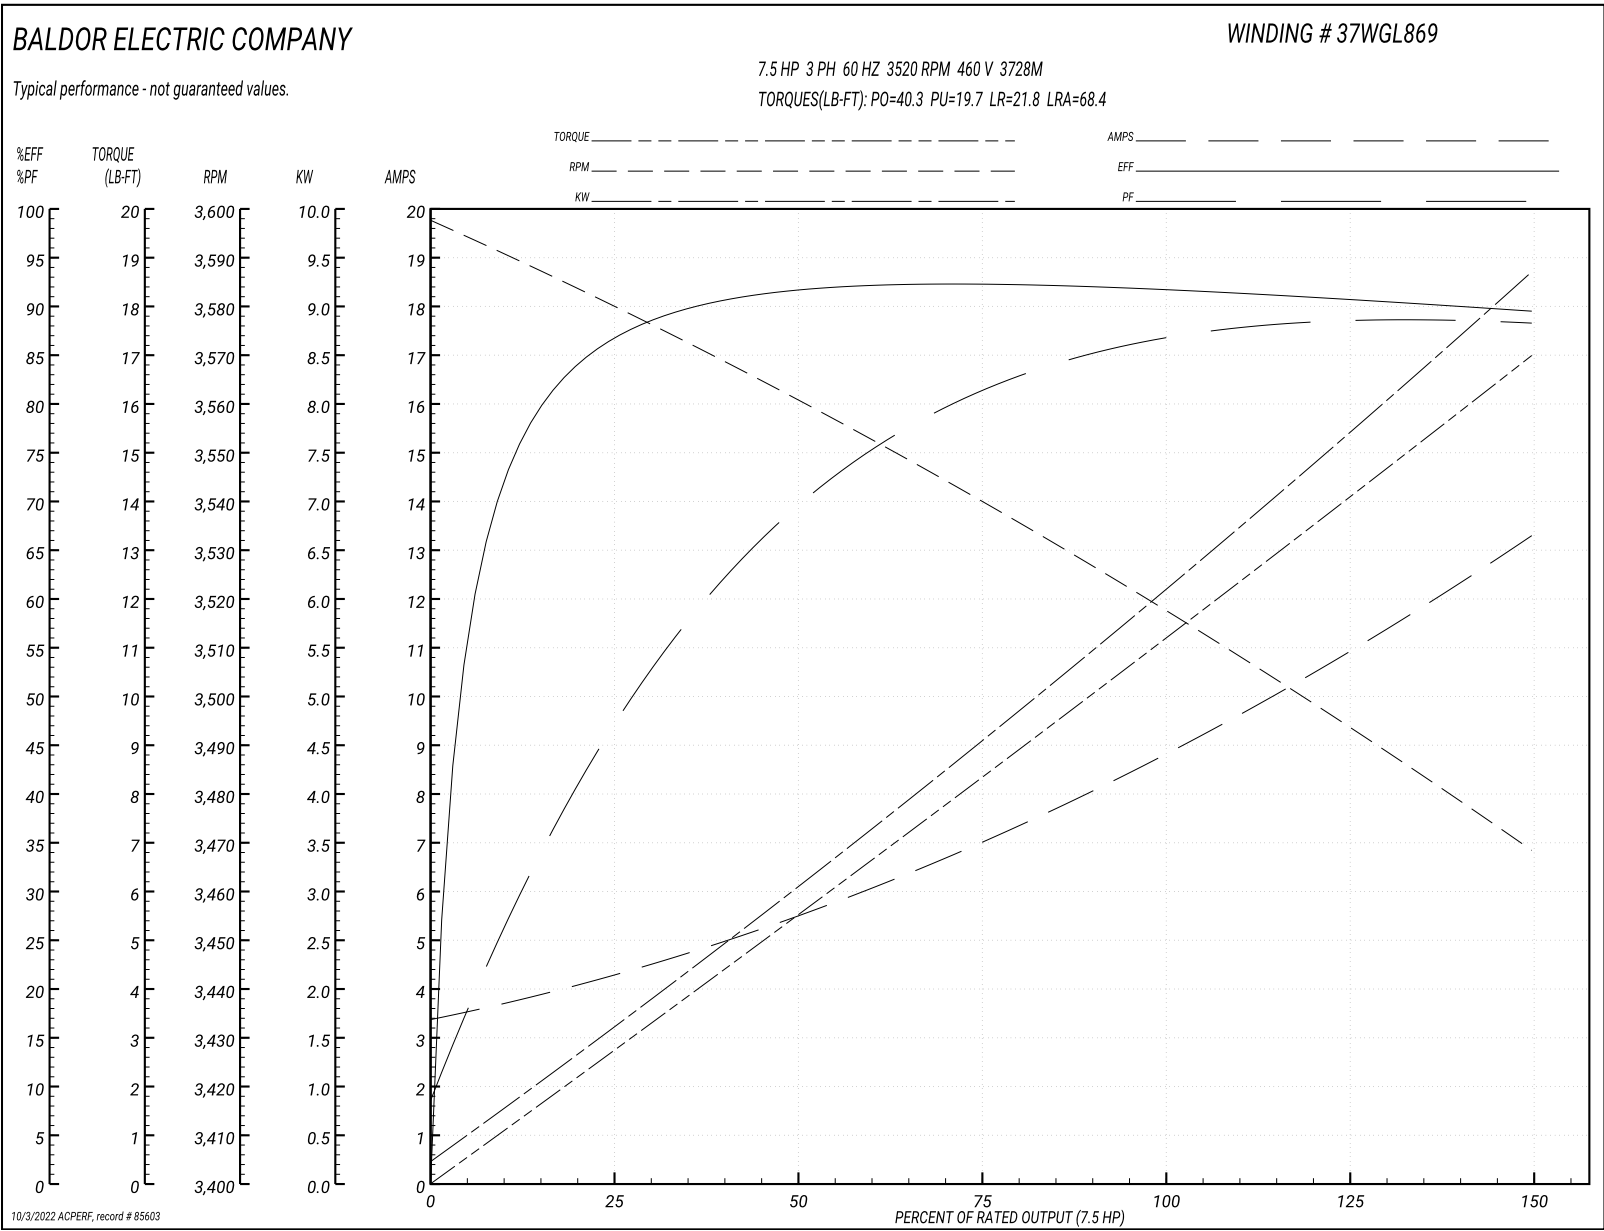


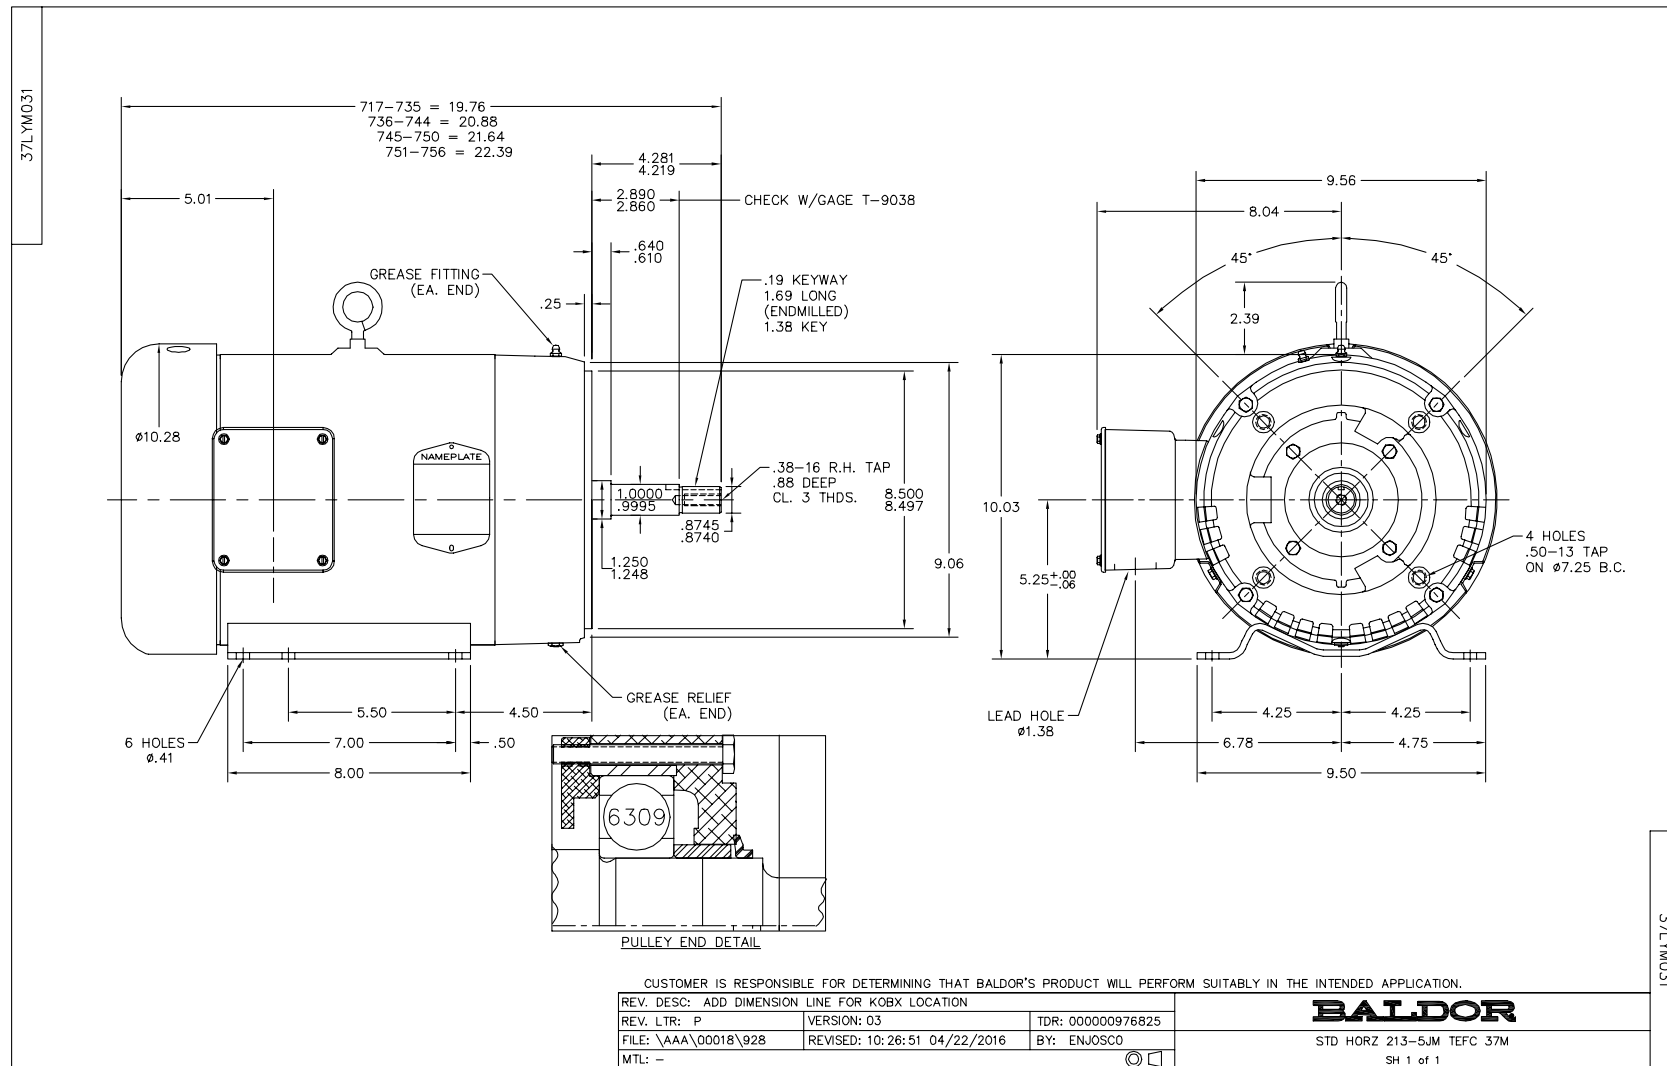

CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005