

**TS 35X15/LL 1M/ST/ZN****Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

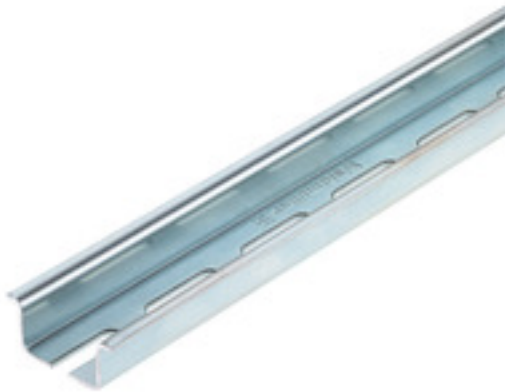
32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

**Product image**

Similar to illustration

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

**General ordering data**

|            |                                                                                |
|------------|--------------------------------------------------------------------------------|
| Version    | Rail, TS 35, TS 35 x 15, with slot, Steel, galvanic zinc plated and passivated |
| Order No.  | <a href="#">0236510000</a>                                                     |
| Type       | TS 35X15/LL 1M/ST/ZN                                                           |
| GTIN (EAN) | 4008190017699                                                                  |
| Qty.       | 1 m                                                                            |

## TS 35X15/LL 1M/ST/ZN

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 15 mm    | Depth (inches)  | 0.591 inch |
| Height     | 35 mm    | Height (inches) | 1.378 inch |
| Width      | 1,000 mm | Width (inches)  | 39.37 inch |
| Net weight | 50 g     |                 |            |

## Mounting rail

|                                                         |                                     |          |
|---------------------------------------------------------|-------------------------------------|----------|
| Drill-hole diameter                                     | 5.2 mm                              |          |
| Installation advice                                     | Direct mounting                     |          |
| Length of the terminal rail                             | min.                                | 0 mm     |
|                                                         | nominal                             | 1,000 mm |
|                                                         | max.                                | 1,000 mm |
| Material                                                | Steel                               |          |
| Pre-punched mounting rail                               | Yes                                 |          |
| Short circuit strength corresponds to E-Cu wire         | 50 mm²                              |          |
| Short-time withstand current according to IEC 60947-7-2 | 6 kA/1s                             |          |
| Slit gap                                                | 11 mm                               |          |
| Slit gap                                                |                                     |          |
| Slit length                                             | 25 mm                               |          |
| Slit length                                             |                                     |          |
| Slit width                                              | 5.2 mm                              |          |
| Slit width                                              |                                     |          |
| Slotted drill holes                                     | Yes                                 |          |
| Solder eyelet hole diameter (D)                         | 5.2 mm                              |          |
| Spacing of holes, centre-to-centre                      | 36 mm                               |          |
| Standards                                               | In accordance with DIN EN 60715     |          |
| Surface finish                                          | galvanic zinc plated and passivated |          |
| Thickness                                               | 1.5 mm                              |          |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001285    | ETIM 7.0    | EC001285    |
| ETIM 8.0    | EC001285    | ECLASS 9.0  | 27-40-06-02 |
| ECLASS 9.1  | 27-40-06-02 | ECLASS 10.0 | 27-40-06-02 |
| ECLASS 11.0 | 27-40-06-02 | ECLASS 12.0 | 27-40-06-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                    |                                                 |
|--------------------|-------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                 |
| Engineering Data   | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>        |
| User Documentation | <a href="#">StorageConditionsTerminalBlocks</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>        |
| Brochures          |                                                 |