


TERMINAL BLOCK TP2I W/O LED SCREW TERM.
 TERMINAL BLOCK TP2 8 CHANNELS F. 2A-DIGITAL OUTPUT
 AND 2X5 MULTIPLICAT. TERMINALS SORT: SCREW TERMINAL
 WITHOUT LED, PACK. UNIT=1 PCS 16 POLE IDC CONNECT.
 FOR CABLE

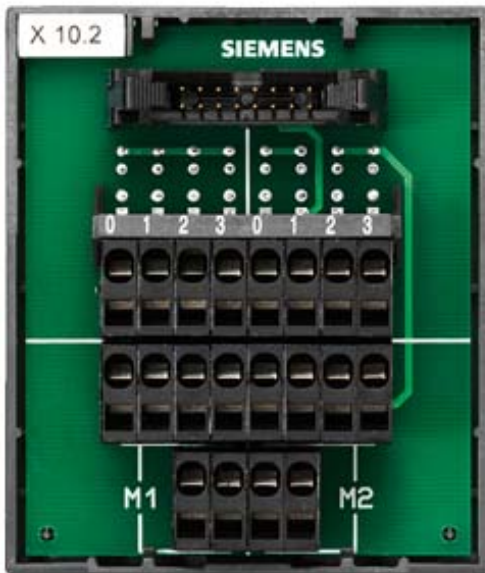

Operating data	
Operating voltage	
• rated value	60 V
Current / rated value	1 A
Operating temperature	0 ... 60 °C
Number of terminal levels	1
Number of terminal points / per terminal level	1
Type of electrical connection / for actuators and sensors	Screw-type terminal
Position / of the terminal	Top
Design of terminal / Terminal levels internally linked	No
Product component	
• PE connection	No
• Shield connection	No
• Disconnecter	No
• required / connection plate	No
Product feature / Infeed function	Yes
Product feature / cross-connectable	No
Connectable conductor cross-section	

• stranded	0.5 ... 2.5 mm ²
• finely stranded / without core end processing	0.5 ... 2.5 mm ²
• finely stranded / with core end processing	0.5 ... 2.5 mm ²
Type of electrical connection / for connecting cable	Plug-in connection

General data	
Mounting type	DIN rail 35 mm, DIN rail 15 mm
Combustibility class acc. to UL 94	V1
Insulation material	other
Design tested acc. to type of protection / EEx e	No
Equipment marking / acc. to DIN EN 81346-2	X
Color	
• of the enclosure	black
• of the light source	without
Length	80 mm
Width / of the enclosure	68 mm
Height / with lowest-profile installation	43.2 mm