

Rating		Pin and Sleeve Devices						Accessories			
Amps	Poles and Wires	Configuration Recep./ Conn.	Plug/ Inlet	AC Voltage	Connector	Receptacle	HP	Mating Plug**	Inlet**	Back Boxes	Closure Caps
60	2P 3W			125V			3				
60	2P 3W			250V							
63	2P 3W			220-240V							
60	2P 3W			480V							
60	3P 4W			125/250V							
60/63	3P 4W			3Ø 250V							
60	3P 4W			3Ø 480V							
60	3P 4W			3Ø 600V							
60/63	3P 4W			380-415V							
60	4P 5W			3ØY 347/600V							
60/63	4P 5W			200/346-240/415V							
60	4P 5W			3ØY 277/480V							
60/63	4P 5W			3ØY 120/208V							

Note: *Certain IEC configurations allow for a single product to be certified as both a North American (Series 2) and International amperage (Series 1). These products are marked accordingly with both the UL Listing and UL Classified markings.

**Mating plug or inlet required to maintain 4X/IP69k ratings when used with ADVANTAGE™ Series Connections. ADVANTAGE™ Series Receptacles have the same mounting pattern as standard Hubbell IEC pin and sleeve. Just add a "P" suffix for Pilot pin for 60 amp devices.

Optional Pilot Pin Available on All 60A Devices

The Pilot Pin is smaller than the ground and phase pins and are designed to make after main and break before main breaks. This pin can be used to communicate with auxiliary devices within your facility. They are "Break before main break" and by design are the last contact in the sequence to make and first to break.




Rating			Pin and Sleeve Devices			
Amps	Poles/Wires	AC Voltage	Connector with Pilot Sleeve	Receptacle with Pilot Sleeve	Plug with Pilot Pin	Inlet with Pilot Pin
60/63	3P 4W	3Ø 250V	HBLS460C9WP*	HBLS460R9WP*	HBLS460P9WP*	HBLS460B9WP*

Note: *Just add a "P" suffix for Pilot pin for 60 amp devices.

Dimensions

Description	A		B		C		D		E		F		G	
	Connector		Receptacle		Receptacle		Receptacle		Receptacle		Receptacle		Receptacle	
30A	9.9"	(251.5)	4.5"	(114.3)	1.06"	(27.2)	3.83"	(97.3)	3.13"	(79.4)	3.75"	(95.2)	4.5"	(114.3)
60A	12.22"	(310.4)	5.17"	(131.3)	1.85"	(47.0)	4.77"	(121.2)	3.88"	(98.6)	4.52"	(114.8)	5.09"	(129.3)

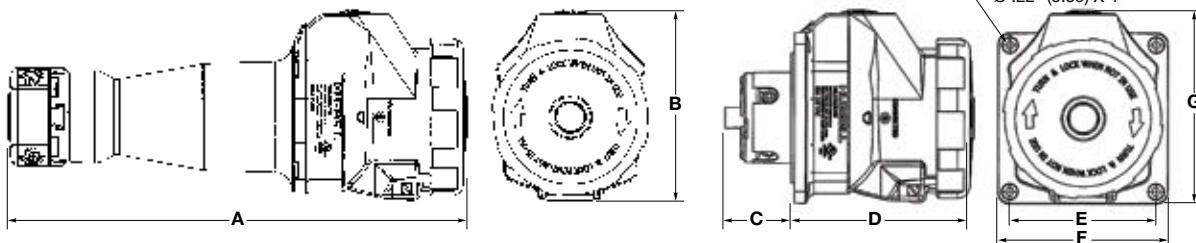

Dimensions in Inches (mm)