






Table of Contents

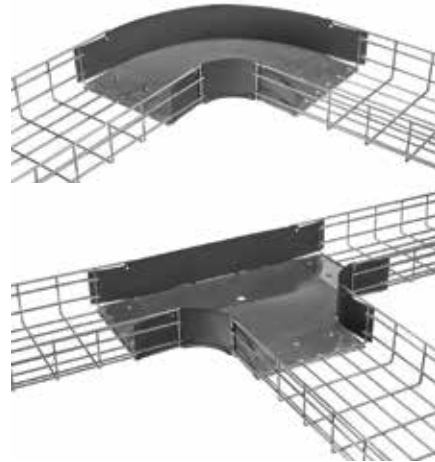


Round and Flat Style Wire Basket Tray

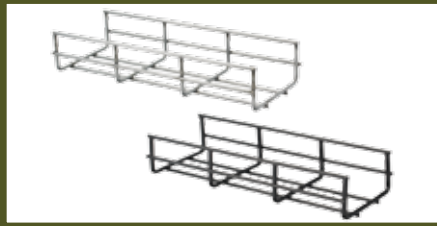

Accessories

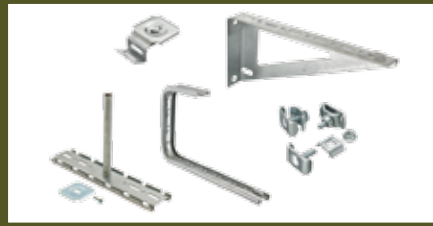

Create a Bill of Material

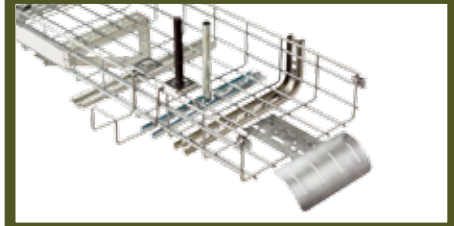

Product	Page
Innovative, Flexible, Field-Configurable Wire Basket Solutions	T-2
Round Cross-Wire Basket Tray	T-3
Electroplated Zinc Round Cross-Wire Basket Tray	T-4
Flat Style Cross-Wire Basket Tray	T-5
Stainless Steel Round Cross-Wire Basket Tray	T-6
Under Floor Round Cross-Wire Basket Tray	T-7

Product	Page
Accessories for Wire Basket Tray	
Preformed Fittings	T-8
Supports and Brackets	T-10
Covers and Inserts	T-11
Supports and Fittings	T-12
Technical Support, Cutting and Forming Fittings	T-13
Wire Fill and Maximum Load Chart	T-14
Wire Basket Tray: Create a Bill of Material	T-15
Technical Specifications	T-16

Wire Basket Tray System



Innovative, Flexible, Field-Configurable Wire Basket Solutions

Support Broad Range of Applications

Hubbell Wiring Systems offers a comprehensive Wire Basket Tray System to handle every application. From pre-galvanized solutions for commercial controlled interior environments to stainless steel versions for industrial applications such as food processing, marine and highly corrosive environments. Hubbell also features labor savings options including No-Splice supports which also reduce material cost and preformed fittings which offer tremendous productivity enhancement to the installer by eliminating field cuts that are required when fittings are configured in the field. Hubbell also offers painted trays in virtually any color needed. The painted tray is masked to reduce on-site paint removal saving time and money. Hubbell Wire Basket Tray Systems are available in overhead and raised floor designs. Complete shipments, job site location palletization and markings, and product customization make Hubbell the choice for every wire basket tray installation.

Customer Support and Technical Assistance

Hubbell's knowledgeable sales team is just a call away for assistance in selecting the proper type basket tray for any application or providing design assistance including developing a bill of material.

Pre-Galvanized Finish is Environmentally Friendly

The standard finish for Hubbell Basket Tray is pre-galvanized which is a significantly more environmentally friendly manufacturing process as compared to galvanizing dip. Pre-galvanizing applies a zinc galvanization to the wire PRIOR to fabrication. The galvanized wire(s) then welded and formed into the appropriate basket tray size. Hubbell's pre-galvanized finish performs the same as post-zinc plated production finish while avoiding secondary chemical processing.


Sustainable Approach

Hubbell utilizes a sustainable approach to assist in maintaining the environment. Our wire basket tray systems utilize 100% recycled steel content in the manufacturing of our tray, and are packaged in kraft unbleached packaging. Packaging and strapping materials are recyclable. MillCerts are available upon request to assist in documenting recycled content for possible LEED credits.



Pre-Galvanized

- Wire is galvanized prior to fabrication
- Applications
 - Commercial
 - Controlled Interiors
- Specification, ASTM A641




Stainless Steel ♦

- Type 304L and 316S
- Applications
 - Industrial
 - Marine
 - Food Processing
 - Outdoor
- Specification, ASTM A580



Painted Finishes

- Powder coat; Black is available as standard, other colors available as special order
- Applications
 - Data Center
 - Controlled Interiors
- Specification, N/A



Electroplated Zinc ♦

- Tray is galvanized after fabrication
- Applications
 - Commercial
 - Controlled Interiors
- Specification, ASTM B633

Note: ♦ Available as a special order.

Hot dip galvanized tray available as special order.

Wire Basket Tray System







Round Cross-Wire Basket Tray



Features

- T-weld construction prevents snags
- 5mm round wire minimum
- High load rating
- Easy to cut and fabricate fittings in the field
- 100% recycled steel
- 2" x 4" mesh opening
- Use factory support hardware or fabricate supports at the job site
- Painted tray includes factory installed masking to ensure proper grounding at splices; no need to remove paint during installation

10 Feet per Length 118.3" (3m) 10 pc. min. order qty. 2" Deep Tray	Tray Width	Load (Lb/ft)	Tray Weight per Length (Lb)	Splice Quantity*		Finish	
				90° Sweep Elbow	Straight Splice	Pre-Galvanized	Black Powder Coat
	4" (102)	45	7	2	2	HBT0204	HBT0204BK
	6" (152) ●	50	9	3	4	HBT0206	HBT0206BK
	8" (203) ●	52	10.5	4	4	HBT0208	HBT0208BK
	12" (305) ●	58	12	6	4	HBT0212	HBT0212BK
	16" (406) ●	70	15	7	4	HBT0216	HBT0216BK
	18" (457) ●	70	23	9	4	HBT0218	HBT0218BK
	20" (508) ●	73	25	9	5	HBT0220	HBT0220BK
	22" (559)	73	27	12	5	HBT0222	HBT0222BK
	24" (610) ●	75	31	12	5	HBT0224	HBT0224BK
	26" (660)	73	33	13	6	HBT0226	HBT0226BK
	28" (711)	73	35	14	6	HBT0228	HBT0228BK
	30" (762)	70	38	15	6	HBT0230	HBT0230BK
	32" (813)	70	39	16	6	HBT0232	HBT0232BK
4" Deep Tray	4" (102)	49	12	2	4	HBT0404	HBT0404BK
	6" (152) ●	49	13	3	5	HBT0406	HBT0406BK
	8" (203) ●	78	15	4	6	HBT0408	HBT0408BK
	12" (305) ●	78	23	6	6	HBT0412	HBT0412BK
	16" (406) ●	108	27	7	7	HBT0416	HBT0416BK
	18" (457) ●	116	29	9	7	HBT0418	HBT0418BK
	20" (508) ●	116	31	9	7	HBT0420	HBT0420BK
	22" (559)	116	33	12	8	HBT0422	HBT0422BK
	24" (610) ●	116	35	12	8	HBT0424	HBT0424BK
	28" (711)	108	39	14	9	HBT0428	HBT0428BK
6" Deep Tray	8" (203) ●	116	23	4	6	HBT0608	HBT0608BK
	12" (305) ●	123	27	6	6	HBT0612	HBT0612BK
	16" (406) ●	123	31	7	7	HBT0616	HBT0616BK
	18" (457) ●	127	33	9	7	HBT0618	HBT0618BK
	20" (508) ●	127	35	9	7	HBT0620	HBT0620BK
	22" (559) ●	127	37	12	8	HBT0622	HBT0622BK
	24" (610) ●	150	39	12	8	HBT0624	HBT0624BK
8" Deep Tray	8" (203) ●	116	27	4	8	HBT0808	HBT0808BK
	12" (305) ●	116	31	6	8	HBT0812	HBT0812BK
	16" (406) ●	116	35	7	9	HBT0816	HBT0816BK
	18" (457) ●	116	37	9	9	HBT0818	HBT0818BK
	20" (508) ●	116	39	9	9	HBT0820	HBT0820BK



Field Configurable Fittings




90° Sweep Elbow
Use appropriate quantity of splice kits




Tee Fitting
Use one HBTC corner splice per each

Supports and Hardware



Ordering Information
See page T-12

Wire Diameter



.1969" Dia.
"Round" Wire Design

Note: ●UL Classified as equipment ground conductor (painted tray cUL Classified only).
All dimensions are +/- 0.25". Custom paint colors available in addition to Black Powder Coat (Contact Hubbell).
*See page T-13 for details and page T-14 for wire fill and maximum load chart.
HBT0202 (2x2 tray) available as special order. MOQ 40 pcs. Top wire utilizes side weld.

Dimensions in Inches (mm)

Wire Basket Tray System




Electroplated Zinc Round Cross-Wire Basket Tray




Features

- T-weld construction prevents snags
- 5mm round wire minimum
- High load rating
- Easy to cut and fabricate fittings in the field
- 2" x 4" mesh opening
- Use factory support hardware or fabricate supports at the job site
- Electroplated zinc galvanized (post plated) made from carbon steel and plated to ASTM B 633, Type III, SC-1

Field Configurable Fittings




90° Sweep Elbow
Use appropriate quantity of splice kits



Tee Fitting
Use one HBTCS corner splice per each

Supports and Hardware




Ordering Information
See page T-12

10 Feet per Length 118.3" (3m) 10 pc. min. order qty. 2" Deep Tray	Tray Width	Load (Lb/ft)	Tray Weight per Length (Lb)	Splice Quantity*		Finish
				90° Sweep Elbow	Straight Splice	
	4" (102)	45	7	2	2	HBT0204ZP
	6" (152) ●	50	9	3	4	HBT0206ZP
	8" (203) ●	52	10.5	4	4	HBT0208ZP
	12" (305) ●	58	12	6	4	HBT0212ZP
	16" (406) ●	70	15	7	4	HBT0216ZP
	18" (457) ●	70	23	9	4	HBT0218ZP
	20" (508) ●	73	25	9	5	HBT0220ZP
	22" (559)	73	27	12	5	HBT0222ZP
	24" (610) ●	75	31	12	5	HBT0224ZP
	26" (660)	73	33	13	6	HBT0226ZP
	28" (711)	73	35	14	6	HBT0228ZP
	30" (762)	70	38	15	6	HBT0230ZP
	32" (813)	70	39	16	6	HBT0232ZP
4" Deep Tray	4" (102)	49	12	2	4	HBT0404ZP
	6" (152) ●	49	13	3	5	HBT0406ZP
	8" (203) ●	78	15	4	6	HBT0408ZP
	12" (305) ●	78	23	6	6	HBT0412ZP
	16" (406) ●	108	27	7	7	HBT0416ZP
	18" (457) ●	116	29	9	7	HBT0418ZP
	20" (508) ●	116	31	9	7	HBT0420ZP
	22" (559)	116	33	12	8	HBT0422ZP
	24" (610) ●	116	35	12	8	HBT0424ZP
	28" (711)	108	39	14	9	HBT0428ZP
6" Deep Tray	8" (203) ●	116	23	4	6	HBT0608ZP
	12" (305) ●	123	27	6	6	HBT0612ZP
	16" (406) ●	123	31	7	7	HBT0616ZP
	18" (457) ●	127	33	9	7	HBT0618ZP
	20" (508) ●	127	35	9	7	HBT0620ZP
	22" (559) ●	127	37	12	8	HBT0622ZP
	24" (610) ●	150	39	12	8	HBT0624ZP
8" Deep Tray	8" (203) ●	116	27	4	8	HBT0808ZP
	12" (305) ●	116	31	6	8	HBT0812ZP
	16" (406) ●	116	35	7	9	HBT0816ZP
	18" (457) ●	116	37	9	9	HBT0818ZP
	20" (508) ●	116	39	9	9	HBT0820ZP

Note: ●UL Classified/cUL Classified as equipment ground conductor.
All dimensions are +/- 0.25".
*See page T-13 for details and page T-14 for wire fill and maximum load chart.

Wire Diameter



.1969" Dia.
"Round" Wire Design

Dimensions in Inches (mm)

Wire Basket Tray System







Flat Style Cross-Wire Basket Tray



Features

- Flat shaped cross-wires provide significantly more surface area to support weight of cables - Ideal for Cat 6 and 6A applications
- Flat ribs provide 400% more surface area and reduce stress on cables by 60%
- 100% recycled steel
- 2" x 4" mesh opening
- Reduction in stress helps maintain Cat 6 and Cat 6A performance
- Cuts and configures the same as round wire tray
- Uses the same splicing and mounting hardware as round wire tray

10 Feet per Length 118.3" (3m) 10 pc. min. order qty. 2" Deep Tray	Tray Width	Load (Lb/ft)	Tray Weight per Length (Lb)	Splice Quantity*		Finish	
				90° Sweep Elbow	Straight Splice	Pre-Galvanized	Black Powder Coat
	4" (102)	45	7	2	2	HBT0204S	HBT0204SBK
	6" (152) ●	50	9	3	4	HBT0206S	HBT0206SBK
	8" (203) ●	52	10.5	4	4	HBT0208S	HBT0208SBK
	12" (305) ●	58	12	6	4	HBT0212S	HBT0212SBK
	16" (406) ●	70	15	7	4	HBT0216S	HBT0216SBK
	18" (457) ●	70	23	9	4	HBT0218S	HBT0218SBK
	20" (508) ●	73	25	9	5	HBT0220S	HBT0220SBK
	22" (559)	73	27	12	5	HBT0222S	HBT0222SBK
	24" (610) ●	75	31	12	5	HBT0224S	HBT0224SBK
	26" (660)	73	33	13	6	HBT0226S	HBT0226SBK
	28" (711)	73	35	14	6	HBT0228S	HBT0228SBK
	30" (762)	70	38	15	6	HBT0230S	HBT0230SBK
32" (813)	70	39	16	6	HBT0232S	HBT0232SBK	
	4" (102)	49	12	2	4	HBT0404S	HBT0404SBK
	6" (152) ●	49	13	3	5	HBT0406S	HBT0406SBK
	8" (203) ●	78	15	4	6	HBT0408S	HBT0408SBK
	12" (305) ●	78	23	6	6	HBT0412S	HBT0412SBK
	16" (406) ●	108	27	7	7	HBT0416S	HBT0416SBK
	18" (457) ●	116	29	9	7	HBT0418S	HBT0418SBK
	20" (508) ●	116	31	9	7	HBT0420S	HBT0420SBK
	22" (559)	116	33	12	8	HBT0422S	HBT0422SBK
	8" (203) ●	116	23	4	6	HBT0608S	HBT0608SBK
	12" (305) ●	123	27	6	6	HBT0612S	HBT0612SBK
	16" (406) ●	123	31	7	7	HBT0616S	HBT0616SBK
	18" (457) ●	127	33	9	7	HBT0618S	HBT0618SBK
	20" (508) ●	127	35	9	7	HBT0620S	HBT0620SBK
	22" (559) ●	127	37	12	8	HBT0622S	HBT0622SBK
	24" (610) ●	150	39	12	8	HBT0624S	HBT0624SBK
	8" (203) ●	116	27	4	8	HBT0808S	HBT0808SBK
	12" (305) ●	116	31	6	8	HBT0812S	HBT0812SBK
	16" (406) ●	116	35	7	9	HBT0816S	HBT0816SBK
	18" (457) ●	116	37	9	9	HBT0818S	HBT0818SBK
20" (508) ●	116	39	9	9	HBT0820S	HBT0820SBK	

Note: ●UL Classified as equipment ground conductor (painted tray cUL Classified only).
All dimensions are +/- 0.25". Custom paint colors available in addition to Black Powder Coat (Contact Hubbell).
*See page T-13 for details and page T-14 for wire fill and maximum load chart.

Field Configurable Fittings




90° Sweep Elbow
Use appropriate quantity of splice kits




Tee Fitting
Use one HBTCS corner splice per each

Supports and Hardware



Ordering Information
See page T-12

Cable Support Area



.03125 sq. inch
"Flat" Wire Design
(based on .125" dia. cable)

Dimensions in Inches (mm)

Wire Basket Tray System



Stainless Steel Round Cross-Wire Basket Tray



Features

- Type 304L and 316S stainless steel
- Meets ASTM A580 specifications
- 4.5mm round wire minimum
- Stainless splice kits and ceiling supports are available


Applications

- Food processing
- Wash down areas
- Corrosive environments
- Outdoor installations
- Marine


Stainless Steel Accessories Available



HBTSSKSS
Splice Kits



HBTCSSS
Corner Splice



HBTWSSS
Washer Support



HBTNBSS
1/4" x 20 Nuts and Bolts

Ordering Information

See page T-12

Wire Diameter



.1772" Dia.
"Round" Wire Design

10 Feet per Length 118.3" (3m) 10 pc. min. order qty. 2" Deep Tray	Tray Width	Load (Lb/ft)	Tray Weight per Length (Lb)	Splice Quantity*		Round	
				90° Sweep Elbow	Straight Splice	Type 304L	Type 316S
	4" (102)	45	7	2	2	HBT0204S04	HBT0204S16
	6" (152)	50	9	3	4	HBT0206S04	HBT0206S16
	8" (203)	52	10.5	4	4	HBT0208S04	HBT0208S16
	12" (305)	58	12	6	4	HBT0212S04	HBT0212S16
	16" (406)	70	15	7	4	HBT0216S04	HBT0216S16
	18" (457)	70	23	9	4	HBT0218S04	HBT0218S16
	20" (508)	73	25	9	5	HBT0220S04	HBT0220S16
	22" (559)	73	27	12	5	HBT0222S04	HBT0222S16
	24" (610)	75	31	12	5	HBT0224S04	HBT0224S16
	26" (660)	73	33	13	6	HBT0226S04	HBT0226S16
	28" (711)	73	35	14	6	HBT0228S04	HBT0228S16
	30" (762)	70	38	15	6	HBT0230S04	HBT0230S16
	32" (813)	70	39	16	6	HBT0232S04	HBT0232S16
	4" (102)	49	12	2	4	HBT0404S04	HBT0404S16
	6" (152)	49	13	3	5	HBT0406S04	HBT0406S16
	8" (203)	78	15	4	6	HBT0408S04	HBT0408S16
	12" (305)	78	23	6	6	HBT0412S04	HBT0412S16
	16" (406)	108	27	7	7	HBT0416S04	HBT0416S16
	18" (457)	116	29	9	7	HBT0418S04	HBT0418S16
	20" (508)	116	31	9	7	HBT0420S04	HBT0420S16
	22" (559)	116	33	12	8	HBT0422S04	HBT0422S16
24" (610)	116	35	12	8	HBT0424S04	HBT0424S16	
28" (711)	108	39	14	9	HBT0428S04	HBT0428S16	
	8" (203)	116	23	4	6	HBT0608S04	HBT0608S16
	12" (305)	123	27	6	6	HBT0612S04	HBT0612S16
	16" (406)	123	31	7	7	HBT0616S04	HBT0616S16
	18" (457)	127	33	9	7	HBT0618S04	HBT0618S16
	20" (508)	127	35	9	7	HBT0620S04	HBT0620S16
	22" (559)	127	37	12	8	HBT0622S04	HBT0622S16
	24" (610)	150	39	12	8	HBT0624S04	HBT0624S16
	8" (203)	116	27	4	8	HBT0808S04	HBT0808S16
	12" (305)	116	31	6	8	HBT0812S04	HBT0812S16
	16" (406)	116	35	7	9	HBT0816S04	HBT0816S16
	18" (457)	116	37	9	9	HBT0818S04	HBT0818S16
	20" (508)	116	39	9	9	HBT0820S04	HBT0820S16

Note: All dimensions are +/- 0.25".
*See page T-13 for details and page T-14 for wire fill and maximum load chart.

Dimensions in Inches (mm)


Wire Basket Tray System




Under Floor Round Cross-Wire Basket Tray

Features


- T-weld construction prevents snags
- 5mm round wire on smaller sizes
- 100% recycled steel
- Use factory support hardware or fabricate supports on the job site
- 2" x 4" mesh opening

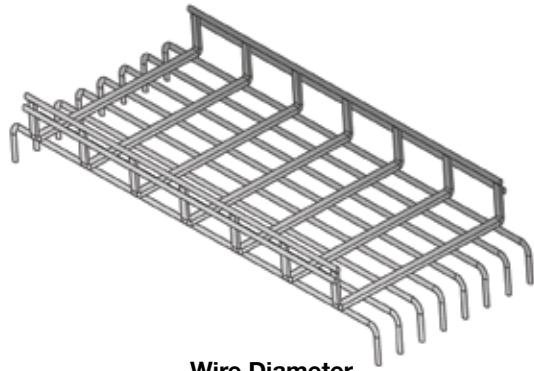

Wire Diameter



.1969" Dia.
"Round" Wire Design

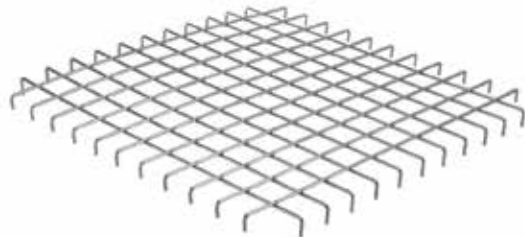

HBTU002424

Tray Height	Tray Width	Tray Length		
		24" (610)	48" (1,220)	72" (1,829)
2" Deep Tray	6" (152)	HBTU020624	HBTU020648	HBTU020672
	12" (305)	HBTU021224	HBTU021248	HBTU021272
	24" (610)	HBTU022424	HBTU022448	HBTU022472
4" Deep Tray	6" (152)	HBTU040624	HBTU040648	HBTU040672
	12" (305)	HBTU041224	HBTU041248	HBTU041272
	24" (610)	HBTU042424	HBTU042448	HBTU042472
6" Deep Tray	6" (152)	HBTU060624	HBTU060648	HBTU060672
	12" (305)	HBTU061224	HBTU061248	HBTU061272
	24" (610)	HBTU062424	HBTU062448	HBTU062472
8" Deep Tray	6" (152)	—	—	—
	12" (305)	HBTU081224	HBTU081248	HBTU081272
	20" (610)	HBTU082024	HBTU082048	HBTU082072
Flat	24" (610)	HBTU002424	—	—

Note: Tray UL Classified as equipment ground conductor.



Splice Hardware

Description	Finish	Catalog Number
Kit, Pedestal (2) HBTUPC and (1) Cross bar	Pre-Galvanized	HBTUPK
C-Bracket 6" Tier 12" Tier	Pre-Galvanized Pre-Galvanized	HBTUCB6 HBTUCB12
U-Clamp, Pedestal (1) Clamp	Pre-Galvanized	HBTUPC
Tray Grounding Fasteners Washer supports HBTWS and 1/4" - 20 self threading screws; 50 per box. Required when installing under floor wire basket tray.	Zinc Plated	HBTUGS
Intersection Supports For use with HBTUSUPP series support	Pre-Galvanized	HBTUFIT
Vertical Up	Pre-Galvanized	HBTUVU

Saw Horse Supports


Support Height	Support Width	Finish	Catalog Number
4" (102)	22" (559)	Pre-Galvanized	HBTUSUPP4
6" (152)	22" (559)	Pre-Galvanized	HBTUSUPP6
8" (203)	22" (559)	Pre-Galvanized	HBTUSUPP8
10" (254)	22" (559)	Pre-Galvanized	HBTUSUPP10
12" (305)	22" (559)	Pre-Galvanized	HBTUSUPP12
14" (356)	22" (559)	Pre-Galvanized	HBTUSUPP14
16" (406)	22" (559)	Pre-Galvanized	HBTUSUPP16
18" (457)	22" (559)	Pre-Galvanized	HBTUSUPP18
20" (508)	22" (559)	Pre-Galvanized	HBTUSUPP20
22" (559)	22" (559)	Pre-Galvanized	HBTUSUPP22
24" (610)	22" (559)	Pre-Galvanized	HBTUSUPP24
26" (660)	22" (559)	Pre-Galvanized	HBTUSUPP26
28" (711)	22" (559)	Pre-Galvanized	HBTUSUPP28
30" (762)	22" (559)	Pre-Galvanized	HBTUSUPP30

Note: See page 10 for L-brackets and C-brackets.
See page 14 for wire fill and maximum load chart.

Dimensions in Inches (mm)



Accessories for Wire Basket Tray, Preformed Fittings

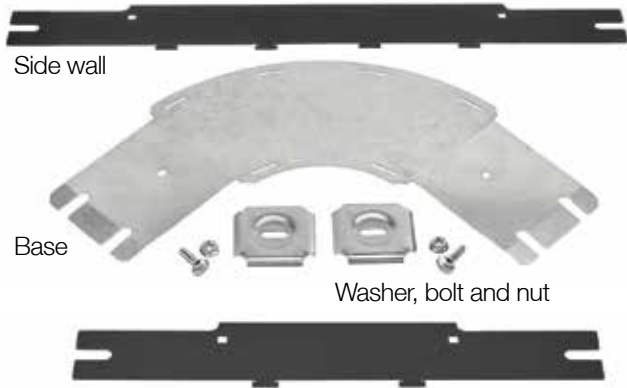


1. Splicing hardware included



2. Attach first tray with washer support and 1/4"-20 nut and bolt



3. Washer support secured to tray

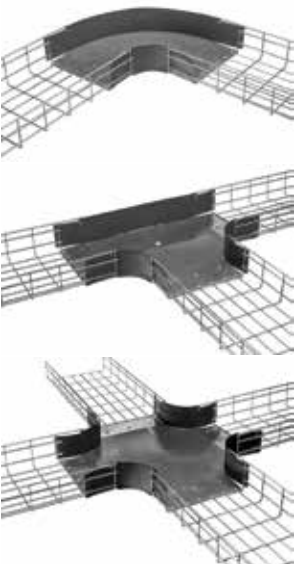

Installation Efficiency

Hubbell preformed fittings are time and cost effective solutions to installing 90 Degree Radius, Tees and Intersections, no cutting and no configuring. Hubbell offers Pre-galvanized or Black powder painted finishes. The fittings simply attach at the Intersections Tees or junctions when you want a radius bend. The fittings are manufactured precisely to the basket tray being utilized providing a clean engineered solution.

Installation of Hubbell preformed fittings can reduce installation configurations from hours to a few minutes. Labor and time savings can exceed 90% versus traditional cutting and splicing. Preformed fittings ensure a consistent installation every time and also avoids the sharp wire edges caused during the cutting process. Standard Hubbell preformed fittings consist of a pregalvanized base with black polymer sides* and splicing hardware.

*Steel wall preform fittings are available.



4. Attach second tray



5. Install side walls

90 Degree Radius

Tray Width	Traditional Configuration	Hubbell Preformed Fittings	Time Savings
2 x 8	7 Minutes	1 Minute	85%
4 x 12	20 Minutes	2 Minutes	90%

Tee

Tray Width	Traditional Configuration	Hubbell Preformed Fittings	Time Savings
4 x 12	8 Minutes, 45 seconds	2 Minutes, 30 seconds	70%
4 x 18	10 Minutes	2 Minutes, 30 seconds	74%

Intersection

Tray Width	Traditional Configuration	Hubbell Preformed Fittings	Time Savings
6 x 24	29 Minutes	4 Minutes, 45 seconds	83%

Wire Basket Tray System




Accessories for Wire Basket Tray, Preformed Fittings



Features

- Labor and time savings
- Consistent installations
- For round and flat tray
- Steel pre-galvanized bases
- Interlocking polymer side walls
- Splicing hardware included
- Available with steel side walls

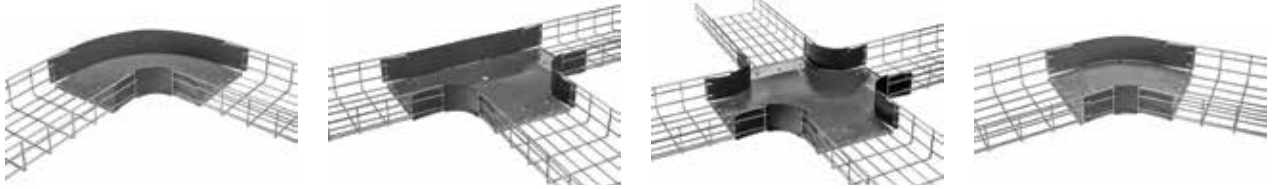

Tray Size	Tray Width	90 Degree	Tee	Intersection	45 Degree	30 Degree
2" (51) Deep	4"(102)	HBTR0204	HBTT0204	HBTI0204	HBT450204	HBT300204
	6"(152)	HBTR0206	HBTT0206	HBTI0206	HBT450206	HBT300206
	8"(203)	HBTR0208	HBTT0208	HBTI0208	HBT450208	HBT300208
	12"(305)	HBTR0212	HBTT0212	HBTI0212	HBT450212	HBT300212
	16"(406)	HBTR0216	HBTT0216	HBTI0216	HBT450216	HBT300216
	18"(457)	HBTR0218	HBTT0218	HBTI0218	HBT450218	HBT300218
	20"(508)	HBTR0220	HBTT0220	HBTI0220	HBT450220	HBT300220
	24"(610)	HBTR0224	HBTT0224	HBTI0224	HBT450224	HBT300224
4" (102) Deep	4"(102)	HBTR0404	HBTT0404	HBTI0404	HBT450404	HBT300404
	6"(152)	HBTR0406	HBTT0406	HBTI0406	HBT450406	HBT300406
	8"(203)	HBTR0408	HBTT0408	HBTI0408	HBT450408	HBT300408
	12"(305)	HBTR0412	HBTT0412	HBTI0412	HBT450412	HBT300412
	16"(406)	HBTR0416	HBTT0416	HBTI0416	HBT450416	HBT300416
	18"(457)	HBTR0418	HBTT0418	HBTI0418	HBT450418	HBT300418
	20"(508)	HBTR0420	HBTT0420	HBTI0420	HBT450420	HBT300420
	24"(610)	HBTR0424	HBTT0424	HBTI0424	HBT450424	HBT300424
6" (152) Deep	8"(203)	HBTR0608	HBTT0608	HBTI0608	HBT450608	HBT300608
	12"(305)	HBTR0612	HBTT0612	HBTI0612	HBT450612	HBT300612
	16"(406)	HBTR0616	HBTT0616	HBTI0616	HBT450616	HBT300616
	18"(457)	HBTR0618	HBTT0618	HBTI0618	HBT450618	HBT300618
	20"(508)	HBTR0620	HBTT0620	HBTI0620	HBT450620	HBT300620
	24"(610)	HBTR0624	HBTT0624	HBTI0624	HBT450624	HBT300624

Note: Add **BK** suffix for black base.
Add **SW** suffix for steel side walls.

Dimensions in Inches (mm)

Wire Basket Tray System



Accessories for Wire Basket Tray - Supports and Brackets

No Splice supports reduces the number of splice kits required for tray installations.



No Splice Support*

Tray Width	Qty. per Box	Center Support		Qty. per Box	Ceiling Support	
		Pre-Galvanized	Black Powder Coat		Pre-Galvanized	Black Powder Coat
6" (152)	1	HBTNSCTRS6	HBTNSCTRS6BK	-	-	-
8" (203)	1	HBTNSCTRS8	HBTNSCTRS8BK	-	-	-
12" (305)	1	HBTNSCTRS12	HBTNSCTRS12BK	1	HBTNSCLGS12	HBTNSCLGS12BK
16" (406)	1	HBTNSCTRS16	HBTNSCTRS16BK	1	HBTNSCLGS16	HBTNSCLGS16BK
18" (457)	1	HBTNSCTRS18	HBTNSCTRS18BK	1	HBTNSCLGS18	HBTNSCLGS18BK
20" (508)	1	HBTNSCTRS20	HBTNSCTRS20BK	1	HBTNSCLGS20	HBTNSCLGS20BK
24" (610)	1	HBTNSCTRS24	HBTNSCTRS24BK	1	HBTNSCLGS24	HBTNSCLGS24BK

Note: *Install every 5 feet. Splice hardware included.



Supports**

Tray Width	Qty. per Box	Center Support		Ceiling Support		Trapeze Support		
		Pre-Galvanized	Black Powder Coat	Pre-Galvanized	Black Powder Coat	Qty. per Box	Zinc Plated	Black Powder Coat
4" (102)	1	HBTCTRS4	HBTCTRS4BK	-	-	50	HBTTS	HBTTSBK
6" (152)	1	HBTCTRS6	HBTCTRS6BK	-	-		Attaches to the side of the tray; for tray sizes 16" wide and smaller; use in pairs every 6 feet for 4" and 6" trays; can be staggered every 5 feet.	
8" (203)	1	HBTCTRS8	HBTCTRS8BK	-	-			
12" (305)	1	HBTCTRS12	HBTCTRS12BK	HBTCLGS12	HBTCLGS12BK			
16" (406)	1	HBTCTRS16	HBTCTRS16BK	HBTCLGS16	HBTCLGS16BK			
18" (457)	1	HBTCTRS18	HBTCTRS18BK	HBTCLGS18	HBTCLGS18BK			
20" (508)	1	HBTCTRS20	HBTCTRS20BK	HBTCLGS20	HBTCLGS20BK			
24" (610)	1	HBTCTRS24	HBTCTRS24BK	HBTCLGS24	HBTCLGS24BK			



Brackets**

Tray Width	Qty. per Box	L-Bracket		C-Bracket		Shelf Support	
		Pre-Galvanized	Black Powder Coat	Pre-Galvanized	Black Powder Coat	Pre-Galvanized	Black Powder Coat
4" (102)	1	HBTLB4	HBTLB4BK	HBTCB4	HBTCB4BK	HBTSS4	HBTSS4BK
6" (152)	1	HBTLB6	HBTLB6BK	-	-	HBTSS6	HBTSS6BK
8" (203)	1	HBTLB8	HBTLB8BK	HBTCB8	HBTCB8BK	HBTSS8	HBTSS8BK
12" (305)	1	HBTLB12	HBTLB12BK	HBTCB12	HBTCB12BK	HBTSS12	HBTSS12BK
16" (406)	1	HBTLB16	HBTLB16BK	-	-	HBTSS16	HBTSS16BK
18" (457)	1	HBTLB18	HBTLB18BK	HBTCB18	HBTCB18BK	HBTSS18	HBTSS18BK
20" (508)	1	HBTLB20	HBTLB20BK	-	-	HBTSS20	HBTSS20BK
24" (610)	1	HBTLB24	HBTLB24BK	-	-	HBTSS24	HBTSS24BK

Note: **Install every 6 feet.

Dimensions in Inches (mm)

Wire Basket Tray System



Accessories for Wire Basket Tray - Covers and Inserts

Black Polymer Inserts with Sides*

Provides a solid bottom and sides for tray - order in 10 foot increments

Tray Width	2" (51) Deep	4" (102) Deep	6" (152) Deep
4" (102)	HBTFRMINS0204BK	HBTFRMINS0404BK	-
6" (152)	HBTFRMINS0206BK	HBTFRMINS0406BK	-
8" (203)	HBTFRMINS0208BK	HBTFRMINS0408BK	HBTFRMINS0608BK
12" (305)	HBTFRMINS0212BK	HBTFRMINS0412BK	HBTFRMINS0612BK
16" (406)	HBTFRMINS0216BK	HBTFRMINS0416BK	HBTFRMINS0616BK
18" (457)	HBTFRMINS0218BK	HBTFRMINS0418BK	HBTFRMINS0618BK
20" (508)	HBTFRMINS0220BK	HBTFRMINS0420BK	HBTFRMINS0620BK
24" (610)	HBTFRMINS0224BK	HBTFRMINS0424BK	HBTFRMINS0624BK


Note: *For white insert, replace **BK** with **WHT**.



Polymer Inserts

Provides a solid bottom for tray - order in 10 foot increments


Tray Width	Length	White	Black
4" (102)	118" (3000)	HBTINSNM04WHT	HBTINSNM04
6" (152)	118" (3000)	HBTINSNM06WHT	HBTINSNM06
8" (203)	118" (3000)	HBTINSNM08WHT	HBTINSNM08
12" (305)	118" (3000)	HBTINSNM12WHT	HBTINSNM12
16" (406)	118" (3000)	HBTINSNM16WHT	HBTINSNM16
18" (457)	118" (3000)	HBTINSNM18WHT	HBTINSNM18
20" (508)	118" (3000)	HBTINSNM20WHT	HBTINSNM20
24" (610)	118" (3000)	HBTINSNM24WHT	HBTINSNM24



Galvanized Steel Inserts

Provides a solid bottom for tray - 5 feet length per piece; 1 piece per box

Tray Width	Length	Pre-Galvanized	Black Powder Coat
4" (102)	59" (1500)	HBTINSM04	HBTINSM04BK
6" (152)	59" (1500)	HBTINSM06	HBTINSM06BK
8" (203)	59" (1500)	HBTINSM08	HBTINSM08BK
12" (305)	59" (1500)	HBTINSM12	HBTINSM12BK
16" (406)	59" (1500)	HBTINSM16	HBTINSM16BK
18" (457)	59" (1500)	HBTINSM18	HBTINSM18BK
20" (508)	59" (1500)	HBTINSM20	HBTINSM20BK
24" (610)	59" (1500)	HBTINSM24	HBTINSM24BK



Galvanized Steel Covers

Top cable and wire protector - 5 feet length per piece; 1 piece per box

Tray Width	Length	Pre-Galvanized	Black Powder Coat
4" (102)	59" (1500)	HBTCVR4	HBTCVR4BK
6" (152)	59" (1500)	HBTCVR6	HBTCVR6BK
8" (203)	59" (1500)	HBTCVR8	HBTCVR8BK
12" (305)	59" (1500)	HBTCVR12	HBTCVR12BK
16" (406)	59" (1500)	HBTCVR16	HBTCVR16BK
18" (457)	59" (1500)	HBTCVR18	HBTCVR18BK
20" (508)	59" (1500)	HBTCVR20	HBTCVR20BK
24" (610)	59" (1500)	HBTCVR24	HBTCVR24BK



Galvanized Termination Support

Secures end of tray to wall and can serve as blank end fitting; 1 piece per box

Tray Width	Length	Pre-Galvanized	Black Powder Coat
6" (152)	6.4" (163)	HBTTTS6	HBTTTS6BK
8" (203)	8" (203)	HBTTTS8	HBTTTS8BK
12" (305)	11.2" (284)	HBTTTS12	HBTTTS12BK
16" (406)	16" (406)	HBTTTS16	HBTTTS16BK
18" (457)	17.6" (447)	HBTTTS18	HBTTTS18BK
20" (508)	19.2" (488)	HBTTTS20	HBTTTS20BK
24" (610)	24" (610)	HBTTTS24	HBTTTS24BK



Galvanized Steel Dividers

Mounting hardware to secure to tray (not included); 2 mounting holes per piece; 5 feet length per piece; 1 piece per box

For use with Tray	Length	Pre-Galvanized	Black Powder Coat
2" (51) Deep	60" (1524)	HBTDIV2	HBTDIV2BK
4" (102) Deep	60" (1524)	HBTDIV4	HBTDIV4BK
6" (152) Deep	60" (1524)	HBTDIV6	HBTDIV6BK
8" (203) Deep	60" (1524)	HBTDIV8	HBTDIV8BK



Dimensions in Inches (mm)

Wire Basket Tray System



Accessories for Wire Basket Tray, Supports and Fittings

Description	Tray Width	Finish	Catalog Number
Radius Down Increases cable protection and cable bend control; 1 per box	4" (102) 6" (152) 12" (305)	Black Black Black	HBTRD4BK HBTRD6BK HBTRD12BK
Exit Radius Down* Top tray attachment, increases cable protection and cable bend control; 1 per box	4X4 Minimum Tray Size	Black	HBTEXTRDBK
Vertical Down Protects cables when dropping from the end or side of tray; 1 per box	7/4" (102)	Zinc Plated Black	HBTVD HBTVDBK
Label Clip Attachment for all sizes of tray; 1 per box		White	HBTLCL
Cable Guide* Maintains cable bend radius and acts as a divider for straight sections and fittings; 1 per box		Black	HBTCG
Electrical Box Bracket Attaches electrical box to side of tray; 1 per box		Pre-Galvanized Black	HBTEB HBTEBBL
Sidocar Attaches to outside of tray, provides additional cable support, 2" deep; 1 per box		Pre-Galvanized Black	HBTSC HBTSCBK
Splice Kit 3 piece staked bolt/washer and nut combination; splices straight sections and field formed fittings; 50 pieces per box		Zinc Plated Black Stainless Steel	HBTSK HBTSKBL HBTSKSS
Bar Splice Slotted bar 11 1/4" long; Splices straight sections and fittings; bend to form tray reducers; adds rigidity to tray splices; 50 pieces per box		Zinc Plated Black Stainless Steel	HBTBS HBTBSBK HBTBSSS
Corner Splice (2) 90° splice bars and (8) sets of the splice kit		Zinc Plated Black Stainless Steel	HBTCS HBTCSBK HBTCSSS
Splice Fittings Required: Use one per each Tee Fitting; Use two per each Cross Fitting			
Washer Supports Splices straight sections and fittings and can also be used as a hold down method for tray to strut (nut and bolt provided separately); 50 pieces per box		Zinc Plated Black Stainless Steel	HBTWS HBTWSBK HBTWSSS
Self Tapping Screws with Supports 1/4" - 20 self tapping screw and HBTWS; 50 pieces per box		Zinc Plated	HBTUGS

Note: *Mounting hardware included.

Description	Finish	Catalog Number
Fitting Attachment Fills the gap in tray when creating fittings in 2" tray or 4"/6" tray	Pre-Galvanized Black	HBTF2A HBTF2A2BK
	Pre-Galvanized Black	HBTF4A6 HBTF4A6BK
Rack Attachment Attaches tray directly to the top of a standard rack	Zinc Plated Black	HBTRA HBTRABK
Conduit Attachment Connects conduit to tray (3/4", 1" and 1 1/4" conduit)	Pre-Galvanized Black	HBTC3A HBTC3A3BK
Nut and Bolt Sets 1/4" - 20 nut and bolt sets; 50 pieces per box	Zinc Plated Stainless Steel	HBTNB HBTNBSS
Cable Drop Outs Black polymer inserts; Installed into the bottom of the basket tray to reduce pinch points and maintain a radius bend on the exiting cables	Black	HBTCDBK
Large Cable Drop Outs Black polymer inserts; Installed into the bottom of the basket tray to reduce pinch points and maintain a radius bend on the exiting cables (tray requires cutting to install)	Black	HBTC4X4BK
Strut Clips Used to hold down basket tray when used with any standard industry strut supports; 50 pieces per box	Pre-Galvanized	HBTSTRUTCLIP
		<ul style="list-style-type: none"> • 12" trays or smaller use 2 clips per strut support • 16" - 18" trays use 3 clips per strut support • Larger trays add one clip per strut support for every 6" of tray width
Grounding Split Bolts These are sold in packs of 10. Bolts are used for supplemental grounding. One bolt is installed per section of basket tray. The installer must supply #6 AWG grounding wire	Copper Alloy	HBTSPLITBOLTPK10




Dimensions in Inches (mm)



Technical Support - Cutting and Forming Fittings

Cutting Wire Basket Tray

- Always make field cuts with the side action angle cutting tool.
- Cuts can be made on any finish, width or depth basket tray.
- Cut as many segments required for sweep elbows (see Splice Quantity column on product pages).
- Remove any sharp edges to eliminate possible damage to cables.



(Side action cutter)


Cutting Tool

Description	Weight (Lb/each)	Qty. per Box	Catalog Number
Manual offset angled cutting tool, 24" leveraged handle	6.0	1	HBTCUTTOOL



How to Form a 90 Degree Flat Sweep Elbow



- Determine which wires must be cut for the type of fitting or redirection required. This will usually be the side and bottom wires of every other mesh section.
- Turn the tray over and cut the bottom wires.
- Cut the top side wire.
- Cut the remaining side wires.
- This creates open gaps in the side wall and bottom of the tray.
- Bend the tray to form the desired elbow radius curve by closing the gaps.
- Install splice kits and hardware where the wedge-shaped sections come together.
- Splice kits provide the mechanical connection as well as electrical grounding continuity.

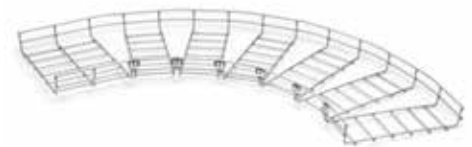

HBTSK Splice Kit
See page T-12 for ordering information.

How to Form a Tee Fitting

- Determine the location of the horizontal "tee" fitting along the length of basket tray.
- Cut the side wires from the tray which shall be the horizontal tray section, to the same width as the perpendicular tray section.
- Do not cut the bottom wires.
- Align the perpendicular tray to the opening in the side of the horizontal tray.
- Position one angle bracket from the HBTCS corner splice kit on each side of the opening.
- Secure the angle brackets to the horizontal and perpendicular tray sections with splice kits (nut, bolt and washer) provided in the HBTCS corner splice kit.
- Support the tee fitting on all three sides of the "tee" using appropriate support method.

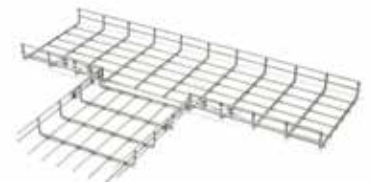

HBTCS Corner Splice
See page T-12 for ordering information.



Wire Fill and Maximum Load Chart

Depth	Width	Area	Cat 5e (0.18" dia.) 50% Wire Fill	Cat 6 (0.23" dia.) 50% Wire Fill	Cat 6a (0.30" dia.) 50% Wire Fill	Max. Load (Lb/ft) (Supported at 6ft spacing)
2	4	8	157	96	57	45
2	6	12	236	144	85	50
2	8	16	315	193	113	52
2	12	24	472	289	170	58
2	16	32	629	385	226	70
2	18	36	708	433	255	70
2	20	40	786	482	283	73
2	22	44	865	530	311	73
2	24	48	944	578	340	75
2	26	52	1022	626	368	73
2	28	56	1101	674	396	73
2	30	60	1180	722	425	70
2	32	64	1258	771	453	70
<hr/>						
4	4	16	315	193	113	49
4	6	24	472	289	170	49
4	8	32	629	385	226	78
4	12	48	944	578	340	78
4	16	64	1258	771	453	108
4	18	72	1415	867	510	116
4	20	80	1573	963	566	116
4	22	88	1730	1060	623	116
4	24	96	1887	1156	679	116
4	28	112	2202	1349	793	108
<hr/>						
6	8	48	944	578	340	116
6	12	72	1415	867	510	123
6	16	96	1887	1156	679	123
6	18	108	2123	1300	764	127
6	20	120	2359	1445	849	127
6	22	132	2595	1589	934	127
6	24	144	2831	1734	1019	150
<hr/>						
8	8	64	1258	771	453	116
8	12	96	1887	1156	679	116
8	16	128	2516	1541	906	116
8	18	144	2831	1734	1019	116
8	20	160	3145	1926	1132	116

Sizes UL Classified or cUL Classified as equipment ground conductor

2" Depth	4" Depth	6" Depth	8" Depth
2 x 6	4 x 6	6 x 8	8 x 8
2 x 8	4 x 8	6 x 12	8 x 12
2 x 12	4 x 12	6 x 16	8 x 16
2 x 16	4 x 16	6 x 18	8 x 20
2 x 18	4 x 18	6 x 20	
2 x 20	4 x 20	6 x 22	
2 x 24	4 x 24	6 x 24	

Note: Applicable to pre-galvanized and powder coat painted when spliced as recommended.
Other non-UL sizes require external grounding conductor.
Stainless steel is not UL listed.


Instructions to Achieve Ground

- Use Hubbell splice kits (**HBTSK**) to achieve proper grounding at all splices, joints and fittings.
- Grounding lugs and external ground wire are not required when **HBTSK** splice kits are utilized with steel tray. (Stainless steel tray requires external grounding conductor.)

Wire Basket Tray System



Wire Basket Tray: Create a Bill of Material

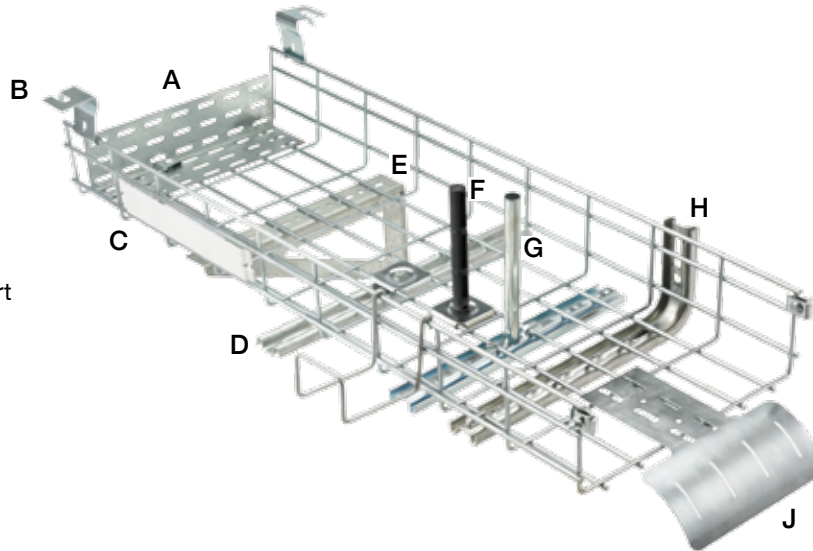

- F Cable Guide
- G Center Support
- H L-Bracket
- I Splice Kit
- J Vertical Down

- A Termination Support
- B Trapeze Clips
- C Label Clip
- D Ceiling Support
- E Shelf Support

Job Name: _____
 Location: _____
 Date: _____

I. Tray Size	Fill in info	II. Finish	Check One	III. Fittings	Qty	IV. Splices	Qty*
Depth (inches):	_____	Pre-galvanized:	<input type="checkbox"/>	90° sweep elbow:	_____	Splice kits:	_____
Width (inches):	_____	Painted black:	<input type="checkbox"/>	Tee fitting:	_____	Corner splice:	_____
Total linear feet:	_____	Stainless steel:	<input type="checkbox"/>	Cross-X fitting:	_____	Washer support:	_____
Total feet/10 = pieces:	_____	Electro-zinc plated:	<input type="checkbox"/>	45° sweep elbow:	_____	Bar splice:	_____
		Custom color paint:	<input type="checkbox"/>	Reducer:	_____		

V. Supports (6ft spacing)	Qty	VI. Cable management	Qty	VII. Attachment hardware	Qty	VIII. Tray accessories	Qty
Ceiling:	_____	Vertical down:	_____	Termination support or blank end:	_____	Steel divider:	_____
Center:	_____	Radius down:	_____	Electrical box bracket:	_____	Steel cover:	_____
Trapeze clips (use in pairs):	_____	Cable guide:	_____	Fitting attachment:	_____	Steel bottom insert:	_____
Wall bracket:	_____	Side car:	_____	Rack attachment:	_____	Polymer bottom insert:	_____
Termination support:	_____			Conduit attachment:	_____	Label clip:	_____
Field fabricated from strut:	_____						

Note: *See product selection tables for quantities of splices. These are dependent upon tray size. Additional splices required for fittings.



Technical Specifications

2.01 ACCEPTABLE MANUFACTURES

1. Manufacturer: Subject to compliance with these specifications wire basket tray systems to be installed shall be Hubbell "HBT" series.

2.02 WIRE TRAY SECTIONS AND COMPONENTS

1. Provide wire basket of types and sizes indicated with all required splicing and mounting hardware. Construct units with T-weld edges and smooth surfaces in compliance with applicable standards and with the following additional construction features.
 - A. All straight section longitudinal wires shall be constructed with a continuous top wire safety edge. Safety edge must be T-welded on all tray sizes.
 - B. Wire basket cross-wire to be constructed with either flat shaped wire design or with round wire design as directed by engineer.
 - Flat shaped cross wire design shall provide additional surface area for cable weight support and to avoid pressure points and strain on cables.
 - Round shaped cross wire design may be used in general purpose applications where cable weight and strain are not concerns.
2. Materials and Finishes: Material and finish specifications for Carbon Steel Wire and Pre-Galvanized steel wire are as follows:
 - A. Pre-galvanized Zinc: Straight section shall be made from pre-galvanized steel meeting the minimum mechanical properties of ASTM A 641. Material must be cleaned after fabrication to remove any soot, manufacturing residue/oils or metallic particles.
 - B. Powder Coat: Straight sections shall be powder coated black with an average paint thickness of 1.2mils (30microns) to 3.0mils (75microns). Hubbell powder coat product is masked at splice points to allow conductive ground design; no field paint removal is required.
 - C. Stainless Steel: Straight sections and accessories shall be made from AISI Type 304L, 316L Stainless Steel (meeting the minimum mechanical properties of ASTM A 580).
 - D. Electro-Plated Zinc Galvanized (Post Plated) Made from Carbon Steel and plated to ASTM B 633, Type III, SC-1.
 - E. Hot Dip Galvanized: Plain steel (ASTM A510) dip after fabricated and formed. ASTM A123.
3. Wire basket shall be made of high strength steel wires and formed into a standard 2-inch by 4-inch wire mesh pattern with intersecting wires welded together. All mesh sections must have at least one bottom longitudinal wire along entire length of straight section.
4. Wire basket sizes shall conform to the following nominal criteria:
 - A. Straight sections shall be furnished in standard 118" (3m) lengths.
 - B. Wire diameter shall be 0.195" (5mm) minimum on all mesh sections. Wire diameter shall be minimum size of 4.5mm on stainless steel.
 - C. Wire basket shall have a 2-inch usable loading depth by (4), (6), (8), (10), (12), (14), (16), (18), (20), (22), (24), (26), (28), (30), (32) inches wide.
 - D. Wire basket shall have a 4-inch usable loading depth by (4), (6), (8), (10), (12), (14), (16), (18), (20), (22), (24), (26), (28) inches wide.
 - E. Wire basket shall have a 6-inch usable loading depth by (8), (10), (12), (14), (16), (18), (20), (22), (24) inches wide.
 - F. Wire basket shall have an 8-inch usable loading depth by (8), (10), (12), (14), (16), (18), (20) inches wide.
5. All fittings shall be field formed from straight sections in accordance with manufacturer's instructions.
6. All Tray sections and splicing assemblies shall be UL/C-UL Classified as an Equipment Ground Conductor (EGC).
7. Wire mesh basket tray supports shall be ceiling trapeze type, center support, trapeze clips, or wall brackets as manufactured by Hubbell.
8. Special accessories shall be furnished as required to protect, support and install a wire basket support system.