


Product type designation

C-PLUG

C-plug, removable data storage medium for simple device replacement in case of fault, for recording configuration or configuration and application data, can be used in the following SIMATIC NET products with C-plug slot: SCALANCE XC-200, XP-200, XM-400, XR-500, M-800 S615 and W-700

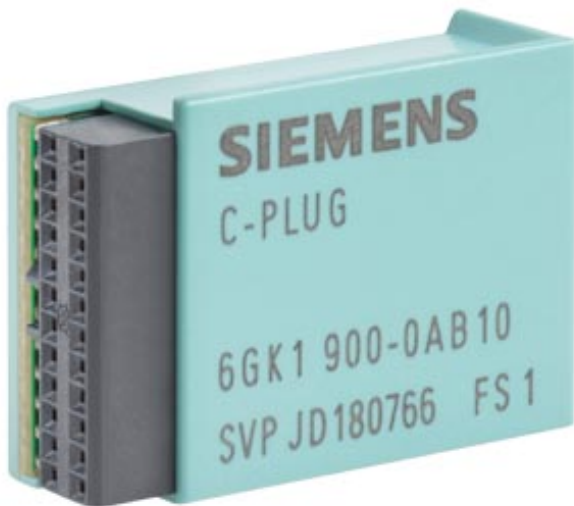

Permitted ambient conditions

Ambient temperature	
<ul style="list-style-type: none"> during operation 	-40 ... +75 °C
<ul style="list-style-type: none"> during storage 	-40 ... +80 °C
<ul style="list-style-type: none"> during transport 	-40 ... +80 °C
Relative humidity	
<ul style="list-style-type: none"> at 25 °C / without condensation / during operation / maximum 	95 %
Protection class IP	IP20

Design, dimensions and weight

Width	24.3 mm
Height	17 mm
Depth	8.1 mm
Net weight	5 g
design of the removable storage	
<ul style="list-style-type: none"> C-PLUG 	Yes
<ul style="list-style-type: none"> KEY-PLUG 	No
Product feature / conformal coating	No

Product properties, functions, components / general

Storage capacity 256 Mibyte

Standards, specifications, approvals

Reference code

- according to IEC 81346-2:2018

CFA

Further Information / Internet Links

Internet-Link

- to website: TIA Selection Tool
- to website: Selector SIMATIC NET SELECTION TOOL
- to the website: IWLAN
- to website: Industrial communication
- to website: Industry Mall
- to website: Information and Download Center
- to website: Image database
- to website: CAx Download Manager
- to website: Industry Online Support

<http://www.siemens.com/tia-selection-tool>

<http://www.siemens.com/snst>

<http://www.siemens.com/iwlan>

<http://www.siemens.com/simatic-net>

<https://mall.industry.siemens.com>

<http://www.siemens.com/industry/infocenter>

<http://automation.siemens.com/bilddb>

<http://www.siemens.com/cax>

<https://support.industry.siemens.com>

last modified:

05/15/2019