










ELECTRICAL  
INTERCONNECTIONS

AUTOMATION

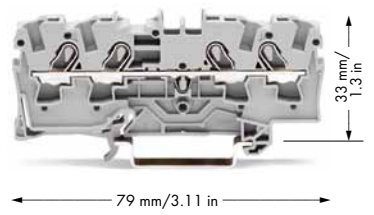



# Product Short Form











































PSF 4.1

**WAGO**®

<p>0.5 - 4 (6) mm<sup>2</sup> ① 800 V/8 kV/3 I<sub>N</sub> 32 A (41 A)</p> <p>AWG 20 - 10 600 V, 30 A  600 V, 30 A </p> <p>Terminal block width 6.2 mm / 0.244 in  11 - 13 mm / 0.47 in</p> <p>② Approvals</p>	<p>0.5 - 4 (6) mm<sup>2</sup> ① 800 V/8 kV/3 I<sub>N</sub> 32 A (41 A)</p> <p>AWG 20 - 10 600 V, 30 A  600 V, 30 A </p> <p>Terminal block width 6.2 mm / 0.244 in  11 - 13 mm / 0.47 in</p> <p>② Approvals</p>	<p>0.5 - 4 (6) mm<sup>2</sup> ① 800 V/8 kV/3 I<sub>N</sub> 32 A (41 A)</p> <p>AWG 20 - 10 600 V, 30 A  600 V, 30 A </p> <p>Terminal block width 6.2 mm / 0.244 in  11 - 13 mm / 0.47 in</p> <p>② Approvals</p>
---	---	---












① Conductor sizes: 0.5 - 6 mm<sup>2</sup> "s + f.st";  
Push-in conductor sizes: 1 - 6 mm<sup>2</sup> "s" and  
0.75 - 4 mm<sup>2</sup> "insulated ferrule, 12 mm"



Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
<b>2-conductor through terminal block</b>			<b>3-conductor through terminal block</b>			<b>4-conductor through terminal block</b>		
 gray 	2004-1201	100	 gray 	2004-1301	100	 gray 	2004-1401	100
 blue 	2004-1204	100	 blue 	2004-1304	100	 blue 	2004-1404	100
 orange 	2004-1202	100	 orange 	2004-1302	100	 orange 	2004-1402	100
 red 	2004-1203	100	 red 	2004-1303	100	 red 	2004-1403	100
 black 	2004-1205	100	 black 	2004-1305	100	 black 	2004-1405	100
 yellow 	2004-1206	100	 yellow 	2004-1306	100	 yellow 	2004-1406	100
<b>2-conductor ground terminal block</b>			<b>3-conductor ground terminal block</b>			<b>4-conductor ground terminal block</b>		
 green-yellow 	2004-1207	100	 green-yellow 	2004-1307	100	 green-yellow 	2004-1407	100







Item-Specific Accessories

Separator for Ex e/Ex i applications, see page 30

<p><b>End and intermediate plate, 1 mm thick</b></p> <p> orange 2004-1292 100 (4x25)  gray 2004-1291 100 (4x25)</p>	<p><b>End and intermediate plate, 1 mm thick</b></p> <p> orange 2004-1392 100 (4x25)  gray 2004-1391 100 (4x25)</p>	<p><b>End and intermediate plate, 1 mm thick</b></p> <p> orange 2004-1492 100 (4x25)  gray 2004-1491 100 (4x25)</p>
<p><b>Separator, oversized, 0.8 mm thick</b></p> <p> orange 2004-1294 100 (4x25)  gray 2004-1293 100 (4x25)</p>	<p><b>Separator, oversized, 0.8 mm thick</b></p> <p> orange 2004-1394 100 (4x25)  gray 2004-1393 100 (4x25)</p>	<p><b>Separator, oversized, 0.8 mm thick</b></p> <p> orange 2004-1494 100 (4x25)  gray 2004-1493 100 (4x25)</p>

2004 Series Accessories

Appropriate marking systems: WMB/Marking strips/Mini-WSB

<p><b>Push-in type jumper bar, insulated, I<sub>N</sub> 32 A, light gray</b></p> <p> 2-way 2004-402 200 (8x25) 3-way 2004-403 200 (8x25) 4-way 2004-404 100 (4x25) : 10-way 2004-410 100 (4x25)</p>	<p><b>Push-in type jumper bar, insulated, I<sub>N</sub> 32 A, light gray</b></p> <p> 1 - 3 2004-433 200 (8x25) 1 - 4 2004-434 200 (8x25) 1 - 5 2004-435 100 (4x25) : 1 - 10 2004-440 100 (4x25)</p>	<p><b>Star point jumper, insulated,</b> I<sub>N</sub> = I<sub>N</sub> terminal block, light gray 1-3-5 2004-405/011-000 100 (4x25)</p> <p><b>Step-down jumper, insulated,</b> I<sub>N</sub> 32 A light gray 2006-499 50 (2x25)</p>
<p><b>Insulation stop, 5 pcs/strip</b> 200 strips</p> <p> light gray 2004-171 0.25-0.5 mm<sup>2</sup> dark gray 2004-172 0.75-1 mm<sup>2</sup></p>	<p><b>Protective warning marker, with high-voltage symbol,</b> for 5 terminal blocks yellow 2004-115 100 (4x25)</p>	<p><b>TOPJOB®S connector, modular,</b> for jumper contact slot gray 2004-511 100 (4x25)</p> <p><b>Spacer module</b> gray 2004-549 100 (4x25)</p>
<p><b>WMB Multi marking system,</b> 10 strips with 10 markers per card, stretchable 5 - 5.2 mm plain 793-5501 5</p>	<p></p> <p>● Suitable for Ex i applications ⊗ Suitable for Ex e II applications 550 V, 30 A</p>	<p><b>Operating tool with partially insulated shaft,</b> type 2, (3.5 x 0.5) mm blade 210-720 1</p> <p></p>
<p><b>Marking strip, plain,</b> 11 mm wide, 50m roll white 2009-110 1</p>		<p><b>Insulated ferrules, extra long,</b> for TOPJOB®S terminal blocks see page 195</p> <p></p>