



3-conductor ground terminal block; suitable for Ex e II applications

Item No.: 2016-1307



3-conductor ground terminal block; suitable for Ex e II applications

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	2016-1307
GTIN / EAN	4017332077200
Content	1
Order amount	20
Customer item number	

Notes

Safety information 1: DIN 35 rails, height 15 mm, must be used if the current load is higher than 76A!



Technical data


Miscellaneous

Packaging type	BOX
Ratings per	IEC/EN 60947-7-2
Type of wiring	Front-entry wiring
Total number of connection points	3
Total number of potentials	1
Number of levels	1

Technical data	
<i>Connection technology</i>	<i>Push-in CAGE CLAMP®</i>
<i>Number of connection points (connection type)</i>	<i>3</i>
<i>Actuation type</i>	<i>Push-in</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Nominal cross section</i>	<i>16 mm²</i>
<i>Solid conductor</i>	<i>0.5 ... 16 mm² / 20 ... 6 AWG</i>
<i>Solid conductor, push-in termination</i>	<i>2.5 ... 16 mm² / 14 ... 6 AWG</i>
<i>Fine-stranded conductor</i>	<i>0.5 ... 25 mm² / 20 ... 4 AWG</i>
<i>Fine-stranded conductor with ferrule, push-in termination, f</i>	<i>2.5 mm² / 14 AWG</i>
<i>Strip length</i>	<i>18 ... 20 mm / 0.71 ... 0.79 Inch</i>
<i>Width</i>	<i>12 mm / 0.472 Inch</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>36.9 mm / 1.453 Inch</i>
<i>Depth</i>	<i>91.8 mm / 3.622 Inch</i>
<i>Design</i>	<i>horizontal</i>
<i>Type of mounting</i>	<i>Carrier rail 35 x 15</i>
<i>Marking level</i>	<i>Center/side marking</i>
<i>Color</i>	<i>green-yellow</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.454 [MJ]</i>
<i>Weight [g]</i>	<i>46.231 [g]</i>

Images & drawings

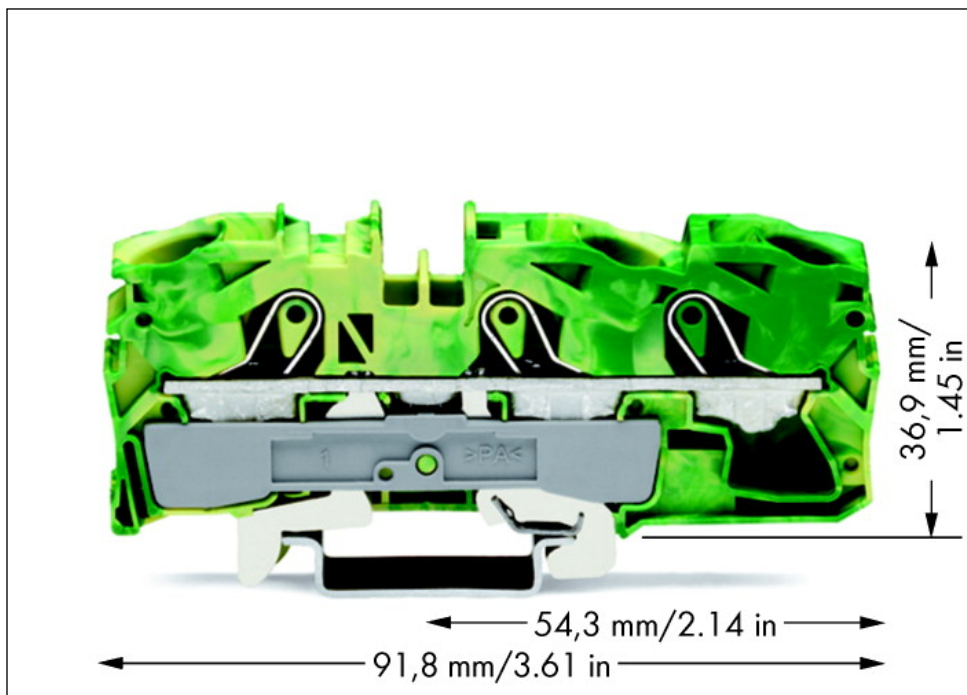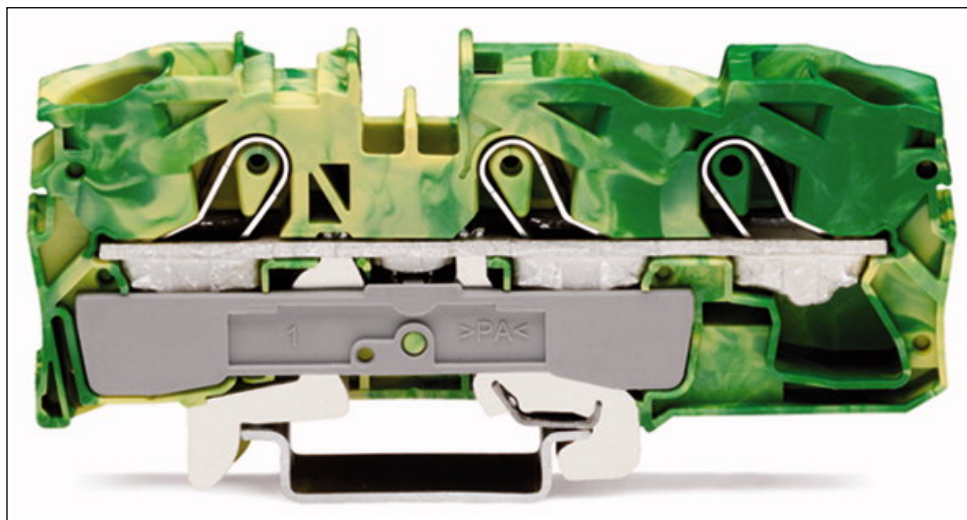

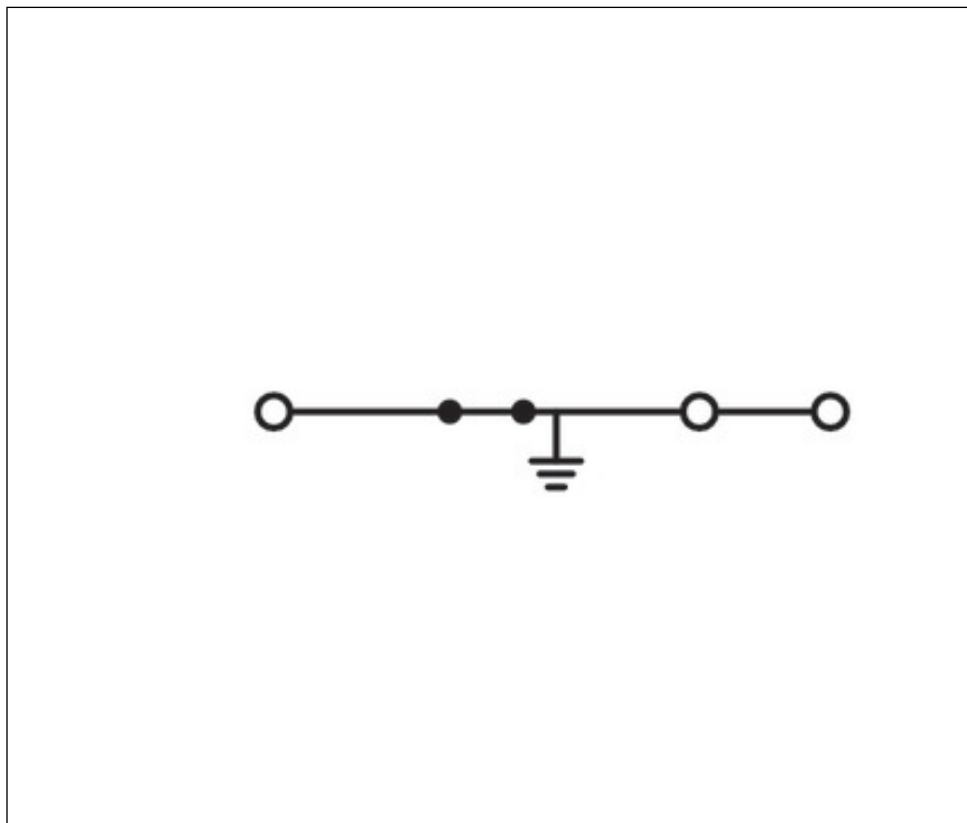

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.