

Savings and Productivity Are Just a "SNAP" Away

Hospital Grade

*Specification Grade
Receptacles*

Split Circuit

Style Line® Decorator

Single Receptacles

GFCIs


*USB Charging
Receptacles*

*Permanently Marked
Receptacles*

Surge Protection

Isolated Ground

Switches

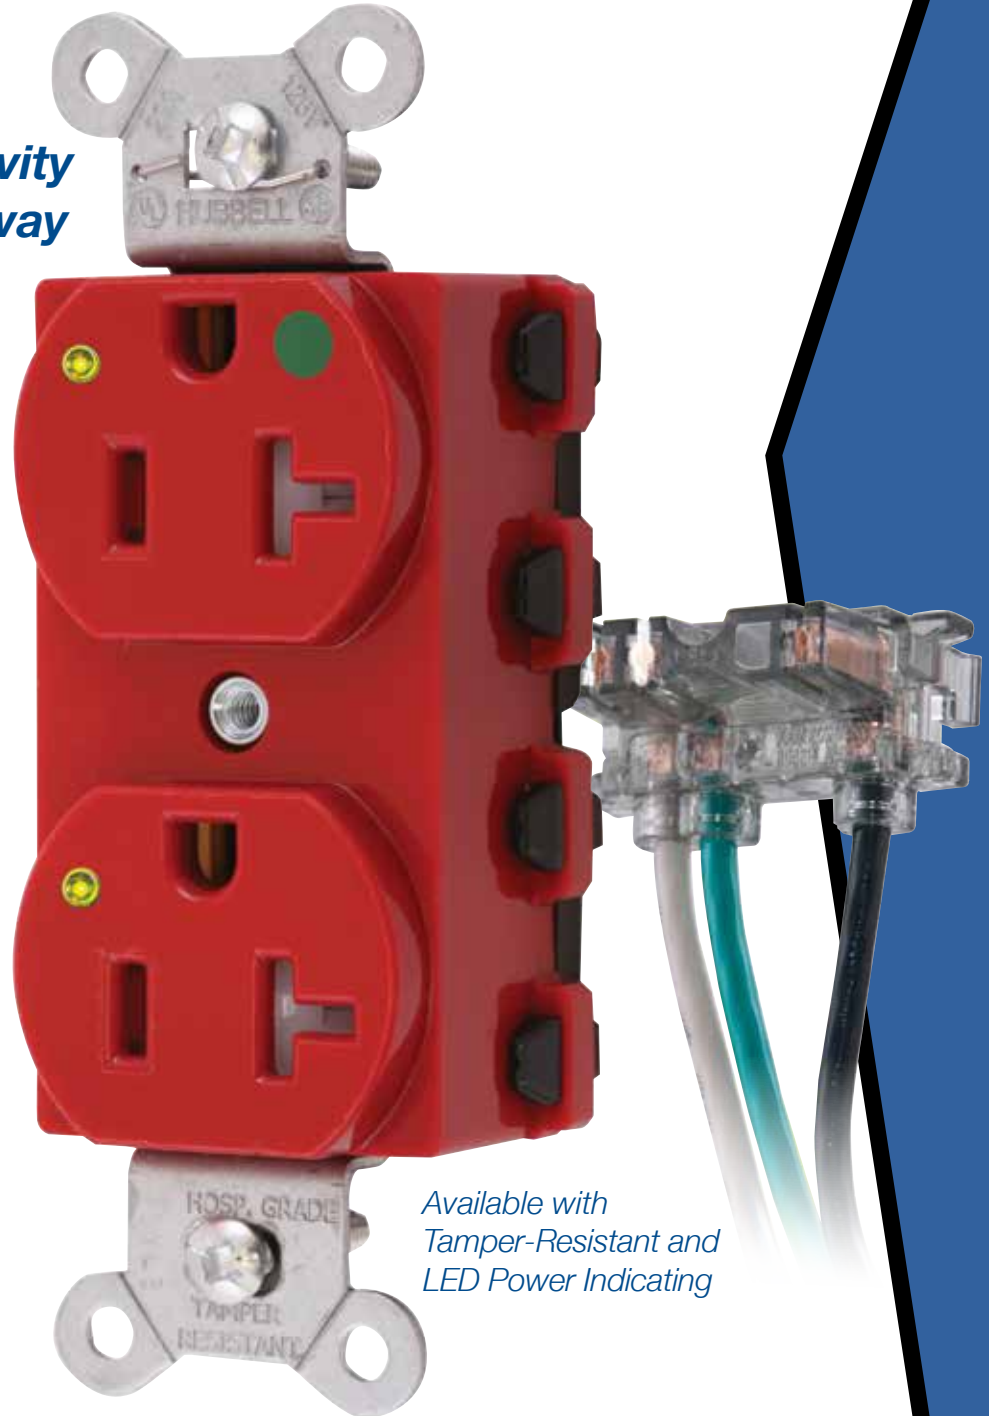

*Available with
Tamper-Resistant and
LED Power Indicating*





Table of Contents

Tester and Connectors
SNAPConnect® Tester and Pigtailed Connectors 3

Receptacles
Extra Heavy Duty
Hospital Grade 4-5

- Standard
- Tamper-Resistant
- LED Power Indicator

Extra Heavy Duty
Specification Grade . . . 6-7

- Standard
- Tamper-Resistant
- LED Power Indicator

Permanently Marked
Receptacles 8-9

- One Controlled Face
- Two Controlled Faces

Single Receptacles 10

- Hospital Grade
- Specification Grade

USB Charger
Receptacles 11

- Hospital Grade
- Specification Grade

GFCI Receptacles 12

- Hospital Grade
- Specification Grade

Surge Receptacles and
Isolated Ground 13

- Hospital Grade
- Specification Grade
- Tamper-Resistant
- LED Power Indicator

Switches
Toggle Switches 14

- Specification Grade
- LED Illuminated
- Pilot Light

Decorator Switches 15

- Specification Grade
- LED Illuminated
- Pilot Light

Many of these products are Assembled in USA, as indicated, and many are Buy American Compliant. Please contact Hubbell with any certification requirements.



Labor Savings Save up to 5 Minutes

Save One Minute
Rough-in the SNAPConnect® terminal instead of pigtails

Save Over Three Minutes
Remove protective packaging and SNAPConnect® the device to the circuit

Complete Trim-Out in Less Than One Minute
Secure mounting screws, attach wallplate and job complete



Power
Indicating

Used most often to identify emergency circuits in hospitals, the two LED power indicators, bright enough to be visible in low light and bright daylight conditions, identify face with power.



Tamper-Resistant

Compliant with NEC® 406.12 and NEC®517-18(c), SNAPConnect® Tamper-Resistant Receptacles are acceptable for use in residential dwellings and pediatric locations.



Isolated
Ground

SNAPConnect® Isolated Ground devices provide a clean ground path for sensitive equipment. Devices are available with power indication and tamper-resistant.



Surge
Protection

SpikeShield® SNAPConnect® Tamper-Resistant Surge receptacles provide excellent point of use protection for sensitive electronic loads from every day power spikes and surges.



USB
Charger
Receptacles

SNAPConnect® USB Charger provides USB power in a standard single gang electrical opening. Designed to provide maximum charging for portable electronics.



Save One Minute!
Rough-in the SNAPConnect® terminal instead of pigtails.



Save Over Three Minutes!
Remove protective packaging and SNAPConnect® device to the circuit.



Complete Trim-Out In Less Than One Minute!
Secure mounting screws, attach wallplate, job complete.

SNAPConnect® Tester


Three in One Tester

- Tests Proper Wiring of the SNAPConnect® Receptacle Terminal
- Tests Proper Wiring of Standard Receptacles
- Tests GFCI Receptacles




Clear Right Angle Pigtailed Connectors

- Audible SNAP, Indicates Solid Connection
 - Secure, Easy Grip Latch
- Inspection of Power Contacts
 - Clear Terminal Housing
 - No Exposed Metal
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



No Special Tester Required
 .085 inch keyhole accepts the probe points found on the most common voltage testers and digital multi-meters




Receptacles



GFCIs



USB Chargers



Toggle Switches



Decorator Switches

SNAPConnect® Tester

Description	Catalog Number
Circuit Tester for SNAPConnect receptacle terminals, GFCI and standard receptacles.	SNAPCTG



SNAPCTG

SNAPConnect® Right Angle Pigtailed Connectors for Receptacles

Description	Wire Type	General Use	Assembled in USA
6 inch wire connector.	Solid	SNAP1RA	SNAP1RNA
6 inch wire with push-wire terminals.		SNAP1RAM2	SNAP1RNAM2
6 inch wire connector.	Stranded	SNAP2RA	SNAP2RNA
6 inch wire with push-wire terminals.		SNAP2RAM2	SNAP2RNAM2
SNAP2RNA with 40 inch leads.		—	SNAP2RNAM1
SNAP2RNA with 100 inch leads.		—	SNAP2RNAM3



SNAP1RA

SNAPConnect® Right Angle Pigtailed Connectors for Switches

Description	Wire Type	Catalog Number
Switch jumper, single pole, illuminated.	—	SNAPSWJUMP
6 inch single pole switch.	Solid	SNAPSP1NA
6 inch single pole switch, wire with push-wire terminals.		SNAPSP1NAM2
6 inch single pole, pilot light switch.		SNAPSP1NA
6 inch single pole, pilot light switch, wire with push-wire terminals.		SNAPSP1NAM2
6 inch 3 way pole, pilot light switch.		SNAP3W1NA
6 inch 3 way pole, pilot light switch, wire with push-wire terminals.		SNAP3W1NAM2
6 inch single pole switch.	Stranded	SNAPSP2NA
6 inch single pole switch, wire with push-wire terminals.		SNAPSP2NAM2
6 inch single pole, pilot light switch.		SNAPSP2NA
6 inch single pole, pilot light switch, wire with push-wire terminals.		SNAPSP2NAM2
6 inch 3 way pole, pilot light switch.		SNAP3W2NA
6 inch 3 way pole, pilot light switch, wire with push-wire terminals.		SNAP3W2NAM2



SNAPSWJUMP



SNAPSP1NA




SNAP3W1NA



Extra Heavy Duty Hospital Grade Duplex Receptacles

Features and Benefits

- Available in Hospital Grade, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available



Applications

- Hospitals
- Healthcare Facilities
- Outpatient Care Centers
- Urgent Care Offices
- Commercial Construction
- Long Term Care
- Labs/Imaging

NEC® Article 517.41 requires receptacles on the emergency circuit to be readily identified by color or wall plate markings. LED power indicators provide instant, visual assurance that power is available at the receptacle. "SNAPConnect® Hospital Grade TR receptacles comply with NEC® section 517.18(C) requiring receptacles located within the rooms, bathrooms, playrooms, activity rooms and patient care areas of designated pediatric locations to be listed tamper-resistant."



SNAPConnect® Extra Heavy Duty Hospital Grade Standard Duplex Receptacles

Color	Hospital Grade ● Finder Groove Face		Hospital Grade ● Smooth Face		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP8200BKA	SNAP8300BKA	SNAP8200BKNA	SNAP8300BKNA	
Brown	SNAP8200A	SNAP8300A	SNAP8200NA	SNAP8300NA	
Gray	SNAP8200GYA	SNAP8300GYA	SNAP8200GYNA	SNAP8300GYNA	
Ivory	SNAP8200IA	SNAP8300IA	SNAP8200INA	SNAP8300INA	
Light Almond	SNAP8200LAA	SNAP8300LAA	SNAP8200LANA	SNAP8300LANA	
Red	SNAP8200RA	SNAP8300RA	SNAP8200RNA	SNAP8300RNA	
White	SNAP8200WA	SNAP8300WA	SNAP8200WNA	SNAP8300WNA	



SNAP8200IA



SNAP8300INA

SNAPConnect® Extra Heavy Duty Hospital Grade Tamper-Resistant Duplex Receptacles

Color	Hospital Grade ● Tamper-Resistant		Hospital Grade ● Tamper-Resistant, Split Circuit		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP8200BKTRA	SNAP8300BKTRA	SNAP8200BKSCTRA	SNAP8300BKSCTRA	
Brown	SNAP8200TRA	SNAP8300TRA	SNAP8200SCTRA	SNAP8300SCTRA	
Gray	SNAP8200GYTRA	SNAP8300GYTRA	SNAP8200GYSCTRA	SNAP8300GYSCTRA	
Ivory	SNAP8200ITRA	SNAP8300ITRA	SNAP8200ISCTRA	SNAP8300ISCTRA	
Light Almond	SNAP8200LATRA	SNAP8300LATRA	SNAP8200LASCTRA	SNAP8300LASCTRA	
Red	SNAP8200RTRA	SNAP8300RTRA	SNAP8200RSCTRA	SNAP8300RSCTRA	
White	SNAP8200WTRA	SNAP8300WTRA	SNAP8200WSCTRA	SNAP8300WSCTRA	



SNAP8200WTRA



SNAP8300SCTRA

SNAPConnect® Extra Heavy Duty Hospital Grade LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

Color	Hospital Grade ● LED		Hospital Grade ● LED & Tamper-Resistant		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP8200BKL	SNAP8300BKL	SNAP8200BKLTRA	SNAP8300BKLTRA	
Brown	SNAP8200L	SNAP8300L	SNAP8200LTRA	SNAP8300LTRA	
Gray	SNAP8200GYL	SNAP8300GYL	SNAP8200GYLTRA	SNAP8300GYLTRA	
Ivory	SNAP8200IIL	SNAP8300IIL	SNAP8200IILTRA	SNAP8300IILTRA	
Light Almond	SNAP8200LAL	SNAP8300LAL	SNAP8200LALTRA	SNAP8300LALTRA	
Red	SNAP8200RL	SNAP8300RL	SNAP8200RLTRA	SNAP8300RLTRA	
White	SNAP8200WL	SNAP8300WL	SNAP8200WLTRA	SNAP8300WLTRA	



SNAP8200GYL




SNAP8300RLTRA

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

Extra Heavy Duty Hospital Grade Style Line® Decorator Receptacles

Features and Benefits

- Available in Hospital Grade, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available

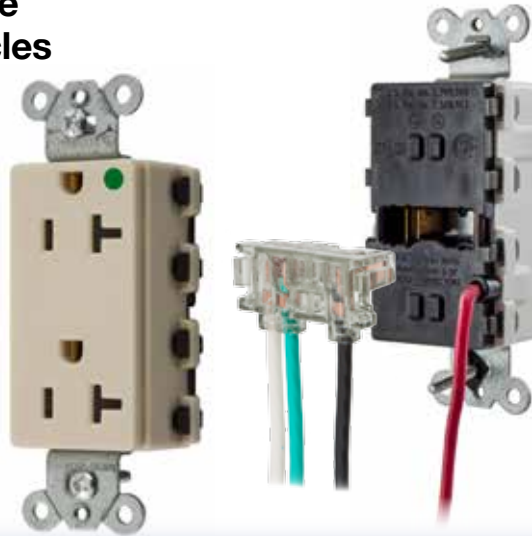

Applications

- Hospitals
- Healthcare Facilities
- Labs/Imaging
- Long Term Care
- Commercial Construction

NEC® Article 517.41 requires receptacles on the emergency circuit to be readily identified by color or wall plate markings. LED power indicators provide instant, visual assurance that power is available at the receptacle. "SNAPConnect® Hospital Grade TR receptacles comply with NEC® section 517.18(C) requiring receptacles located within the rooms, bathrooms, playrooms, activity rooms and patient care areas of designated pediatric locations to be listed tamper-resistant."

SNAPConnect® Extra Heavy Duty Hospital Grade Style Line® Decorator Standard Duplex Receptacles

Color	Hospital Grade ● Standard		Hospital Grade ● Standard		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2172BKA	SNAP2182BKA	SNAP2172BKNA	SNAP2182BKNA	 SNAP2172GYA SNAP2182INA
Brown	SNAP2172A	SNAP2182A	SNAP2172NA	SNAP2182NA	
Gray	SNAP2172GYA	SNAP2182GYA	SNAP2172GYNA	SNAP2182GYNA	
Ivory	SNAP2172IA	SNAP2182IA	SNAP2172INA	SNAP2182INA	
Light Almond	SNAP2172LAA	SNAP2182LAA	SNAP2172LANA	SNAP2182LANA	
Red	SNAP2172RA	SNAP2182RA	SNAP2172RNA	SNAP2182RNA	
White	SNAP2172WA	SNAP2182WA	SNAP2172WNA	SNAP2182WNA	



SNAPConnect® Extra Heavy Duty Hospital Grade Tamper-Resistant Style Line® Decorator Duplex Receptacles

Color	Hospital Grade ● Tamper-Resistant		Hospital Grade ● Tamper-Resistant, Split Circuit		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2172BKTRA	SNAP2182BKTRA	SNAP2172BKSCTRA	SNAP2182BKSCTRA	 SNAP2172BKTRA SNAP2182WSCTRA
Brown	SNAP2172TRA	SNAP2182TRA	SNAP2172SCTRA	SNAP2182SCTRA	
Gray	SNAP2172GYTRA	SNAP2182GYTRA	SNAP2172GYSCTRA	SNAP2182GYSCTRA	
Ivory	SNAP2172ITRA	SNAP2182ITRA	SNAP2172ISCTRA	SNAP2182ISCTRA	
Light Almond	SNAP2172LATRA	SNAP2182LATRA	SNAP2172LASCTRA	SNAP2182LASCTRA	
Red	SNAP2172RTRA	SNAP2182RTRA	SNAP2172RSCTRA	SNAP2182RSCTRA	
White	SNAP2172WTRA	SNAP2182WTRA	SNAP2172WSCTRA	SNAP2182WSCTRA	

SNAPConnect® Extra Heavy Duty Hospital Grade Style Line® Decorator LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles BAA Compliant

Color	Hospital Grade ● LED		Hospital Grade ● LED & Tamper-Resistant		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2172BKL	SNAP2182BKL	SNAP2172BKLTR	SNAP2182BKLTR	 SNAP2182RL SNAP2182GYLTR
Brown	SNAP2172L	SNAP2182L	SNAP2172LTR	SNAP2182LTR	
Gray	SNAP2172GYL	SNAP2182GYL	SNAP2172GYLTR	SNAP2182GYLTR	
Ivory	SNAP2172IL	SNAP2182IL	SNAP2172ILTR	SNAP2182ILTR	
Light Almond	SNAP2172LAL	SNAP2182LAL	SNAP2172LALTR	SNAP2182LALTR	
Red	SNAP2172RL	SNAP2182RL	SNAP2172RLTR	SNAP2182RLTR	
White	SNAP2172WL	SNAP2182WL	SNAP2172WLTR	SNAP2182WLTR	


Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.



Extra Heavy Duty Specification Grade Duplex Receptacles

Features and Benefits

- Available in Standard, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available



Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Article 406.12).



SNAPConnect® Extra Heavy Duty Standard Duplex Receptacles

Color	Specification Grade Finder Groove Face		Specification Grade Smooth Face		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP5262BKA	SNAP5362BKA	SNAP5262BKNA	SNAP5362BKNA	
Blue	—	—	SNAP5262BLNA	SNAP5362BLNA	
Brown	SNAP5262A	SNAP5362A	SNAP5262NA	SNAP5362NA	
Gray	SNAP5262GYA	SNAP5362GYA	SNAP5262GYNA	SNAP5362GYNA	
Ivory	SNAP5262IA	SNAP5362IA	SNAP5262INA	SNAP5362INA	
Light Almond	SNAP5262LAA	SNAP5362LAA	SNAP5262LANA	SNAP5362LANA	
Red	SNAP5262RA	SNAP5362RA	SNAP5262RNA	SNAP5362RNA	
White	SNAP5262WA	SNAP5362WA	SNAP5262WNA	SNAP5362WNA	



SNAP5262IA

SNAP5262NA

SNAPConnect® Extra Heavy Duty Tamper-Resistant Duplex Receptacles

Color	Specification Grade Tamper-Resistant		Spec. Grade Tamper-Resistant, Split Circuit		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP5262BKTRA	SNAP5362BKTRA	SNAP5262BKSCTRA	SNAP5362BKSCTRA	
Blue	SNAP5262BLTRA	SNAP5362BLTRA	SNAP5262BLSCTRA	SNAP5362BLSCTRA	
Brown	SNAP5262TRA	SNAP5362TRA	SNAP5262SCTRA	SNAP5362SCTRA	
Gray	SNAP5262GYTRA	SNAP5362GYTRA	SNAP5262GYSCTRA	SNAP5362GYSCTRA	
Ivory	SNAP5262ITRA	SNAP5362ITRA	SNAP5262ISCTRA	SNAP5362ISCTRA	
Light Almond	SNAP5262LATRA	SNAP5362LATRA	SNAP5262LASCTRA	SNAP5362LASCTRA	
Red	SNAP5262RTRA	SNAP5362RTRA	SNAP5262RSCTRA	SNAP5362RSCTRA	
White	SNAP5262WTRA	SNAP5362WTRA	SNAP5262WSCTRA	SNAP5362WSCTRA	



SNAP5262BKTRA

SNAP5362WSCTRA

SNAPConnect® Extra Heavy Duty LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

Color	Specification Grade LED		Spec. Grade LED & Tamper-Resistant		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP5262BKL	SNAP5362BKL	SNAP5262BKLTRA	SNAP5362BKLTRA	
Blue	SNAP5262BLL	SNAP5362BLL	SNAP5262BLLTRA	SNAP5362BLLTRA	
Brown	SNAP5262L	SNAP5362L	SNAP5262LTRA	SNAP5362LTRA	
Gray	SNAP5262GYL	SNAP5362GYL	SNAP5262GYLTRA	SNAP5362GYLTRA	
Ivory	SNAP5262IL	SNAP5362IL	SNAP5262ILTRA	SNAP5362ILTRA	
Light Almond	SNAP5262LAL	SNAP5362LAL	SNAP5262LALTRA	SNAP5362LALTRA	
Red	SNAP5262RL	SNAP5362RL	SNAP5262RLTRA	SNAP5362RLTRA	
White	SNAP5262WL	SNAP5362WL	SNAP5262WLTRA	SNAP5362WLTRA	



SNAP5262BLL

SNAP5362GYLTRA

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

Extra Heavy Duty Specification Grade Style Line® Decorator Receptacles

Features and Benefits

- Available in Standard, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available



Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Article 406.12).

SNAPConnect® Extra Heavy Duty Style Line® Decorator Standard Duplex Receptacles

Color	Specification Grade Standard		Specification Grade Standard		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2152BKA	SNAP2162BKA	SNAP2152BKNA	SNAP2162BKNA	
Blue	—	—	SNAP2152BLNA	SNAP2162BLNA	
Brown	SNAP2152A	SNAP2162A	SNAP2152NA	SNAP2162NA	
Gray	SNAP2152GYA	SNAP2162GYA	SNAP2152GYNA	SNAP2162GYNA	
Ivory	SNAP2152IA	SNAP2162IA	SNAP2152INA	SNAP2162INA	
Light Almond	SNAP2152LAA	SNAP2162LAA	SNAP2152LANA	SNAP2162LANA	
Red	SNAP2152RA	SNAP2162RA	SNAP2152RNA	SNAP2162RNA	
White	SNAP2152WA	SNAP2162WA	SNAP2152WNA	SNAP2162WNA	



SNAPConnect® Extra Heavy Duty Style Line® Decorator Tamper-Resistant Duplex Receptacles

Color	Specification Grade Tamper-Resistant		Spec. Grade Tamper-Resistant, Split Circuit		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2152BKTRA	SNAP2162BKTRA	SNAP2152BKSCTRA	SNAP2162BKSCTRA	
Blue	SNAP2152BLTRA	SNAP2162BLTRA	SNAP2152BLSCTRA	SNAP2162BLSCTRA	
Brown	SNAP2152TRA	SNAP2162TRA	SNAP2152SCTRA	SNAP2162SCTRA	
Gray	SNAP2152GYTRA	SNAP2162GYTRA	SNAP2152GYSCTRA	SNAP2162GYSCTRA	
Ivory	SNAP2152ITRA	SNAP2162ITRA	SNAP2152ISCTRA	SNAP2162ISCTRA	
Light Almond	SNAP2152LATRA	SNAP2162LATRA	SNAP2152LASCTRA	SNAP2162LASCTRA	
Red	SNAP2152RTRA	SNAP2162RTRA	SNAP2152RSCTRA	SNAP2162RSCTRA	
White	SNAP2152WTRA	SNAP2162WTRA	SNAP2152WSCTRA	SNAP2162WSCTRA	



SNAPConnect® Extra Heavy Duty Style Line® Decorator LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

Color	Specification Grade LED		Spec. Grade LED & Tamper-Resistant		BAA Compliant
	15A 125V	20A 125V	15A 125V	20A 125V	
Black	SNAP2152BKL	SNAP2162BKL	SNAP2152BKLTRA	SNAP2162BKLTRA	
Blue	SNAP2152BLL	SNAP2162BLL	SNAP2152BLLTRA	SNAP2162BLLTRA	
Brown	SNAP2152L	SNAP2162L	SNAP2152LTRA	SNAP2162LTRA	
Gray	SNAP2152GYL	SNAP2162GYL	SNAP2152GYLTRA	SNAP2162GYLTRA	
Ivory	SNAP2152IL	SNAP2162IL	SNAP2152ILTRA	SNAP2162ILTRA	
Light Almond	SNAP2152LAL	SNAP2162LAL	SNAP2152LALTRA	SNAP2162LALTRA	
Red	SNAP2152RL	SNAP2162RL	SNAP2152RLTRA	SNAP2162RLTRA	
White	SNAP2152WL	SNAP2162WL	SNAP2152WLTRA	SNAP2162WLTRA	



Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.



Permanently Marked Standard Duplex Receptacles


Features and Benefits

- Permanent Power Symbol Remains Clearly Visible After Installation
- Control Both Outlets per Device for 100% Controlled Applications or Just One Outlet for 50% Controlled Applications
- Part of the Hubbell Load:Logic™ Plug Control System. For Details Visit www.hubbell-wiring.com



Applications

- Commercial Buildings
- Retail
- Education
- Hotel Rooms



Codes and Standards

2017 National Electric Code®



2017 Section 406.3 (E) requires that all non-locking, 125V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the symbol.

ASHRAE Energy Efficiency Standard 90.1 2013



Standard 90.1 requires that 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices and computer classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.

California Title 24 2016



California Title 24 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces and copy room.



SNAPConnect® Permanently Marked Receptacles for Use with Automatic Plug Load Controls

Description	Color	15A	20A	15A Tamper-Resistant	20A Tamper-Resistant
Standard Duplex One Face Controlled Split Circuit Snap	Black	SNAP5262C1BK	SNAP5362C1BK	SNAP5262C1BKTR	SNAP5362C1BKTR
	Blue	SNAP5262C1BL	SNAP5362C1BL	SNAP5262C1BLTR	SNAP5362C1BLTR
	Brown	SNAP5262C1	SNAP5362C1	SNAP5262C1TR	SNAP5362C1TR
	Gray	SNAP5262C1GY	SNAP5362C1GY	SNAP5262C1GYTR	SNAP5362C1GYTR
	Green	SNAP5262C1GN	SNAP5362C1GN	SNAP5262C1GNTR	SNAP5362C1GNTR
	Ivory	SNAP5262C1I	SNAP5362C1I	SNAP5262C1ITR	SNAP5362C1ITR
	Light Almond	SNAP5262C1LA	SNAP5362C1LA	SNAP5262C1LATR	SNAP5362C1LATR
	Red	SNAP5262C1R	SNAP5362C1R	SNAP5262C1RTR	SNAP5362C1RTR
	White	SNAP5262C1W	SNAP5362C1W	SNAP5262C1WTR	SNAP5362C1WTR
	Standard Duplex Both Faces Controlled	Black	SNAP5262C2BK	SNAP5362C2BK	SNAP5262C2BKTR
Blue		SNAP5262C2BL	SNAP5362C2BL	SNAP5262C2BLTR	SNAP5362C2BLTR
Brown		SNAP5262C2	SNAP5362C2	SNAP5262C2TR	SNAP5362C2TR
Gray		SNAP5262C2GY	SNAP5362C2GY	SNAP5262C2GYTR	SNAP5362C2GYTR
Green		SNAP5262C2GN	SNAP5362C2GN	SNAP5262C2GNTR	SNAP5362C2GNTR
Ivory		SNAP5262C2I	SNAP5362C2I	SNAP5262C2ITR	SNAP5362C2ITR
Light Almond		SNAP5262C2LA	SNAP5362C2LA	SNAP5262C2LATR	SNAP5362C2LATR
Red		SNAP5262C2R	SNAP5362C2R	SNAP5262C2RTR	SNAP5362C2RTR
White		SNAP5262C2W	SNAP5362C2W	SNAP5262C2WTR	SNAP5362C2WTR

Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

Description	Wire Type	Catalog Number
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	Solid	SNAP1RA
	Stranded	SNAP2RA


Permanent Controlled Receptacle Label

Description	Catalog Number
For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling, 60 labels of each per pack.	CL60

Permanently Marked Style Line® Decorator Receptacles

Features and Benefits

- Permanent Power Symbol Remains Clearly Visible After Installation
- Control Both Outlets per Device for 100% Controlled Applications or Just One Outlet for 50% Controlled Applications
- Part of the Hubbell Load:Logic™ Plug Control System. For Details Visit www.hubbell-wiring.com



Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

Codes and Standards

2017 National Electric Code®



ASHRAE Energy Efficiency Standard 90.1 2013



California Title 24 2016



2017 Section 406.3 (E) requires that all non-locking, 125V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the symbol.

Standard 90.1 requires that 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices and computer classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.

California Title 24 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces and copy room.

SNAPConnect® Permanently Marked Receptacles for Use with Automatic Plug Load Controls

Description	Color	15A	20A	15A Tamper-Resistant	20A Tamper-Resistant
 One Face Controlled Split Circuit Snap	Black	SNAP2152C1BK	SNAP2162C1BK	SNAP2152C1BKTR	SNAP2162C1BKTR
	Blue	SNAP2152C1BL	SNAP2162C1BL	SNAP2152C1BLTR	SNAP2162C1BLTR
	Brown	SNAP2152C1	SNAP2162C1	SNAP2152C1TR	SNAP2162C1TR
	Gray	SNAP2152C1GY	SNAP2162C1GY	SNAP2152C1GYTR	SNAP2162C1GYTR
	Green	SNAP2152C1GN	SNAP2162C1GN	SNAP2152C1GNTR	SNAP2162C1GNTR
	Ivory	SNAP2152C1I	SNAP2162C1I	SNAP2152C1ITR	SNAP2162C1ITR
	Light Almond	SNAP2152C1LA	SNAP2162C1LA	SNAP2152C1LATR	SNAP2162C1LATR
	Red	SNAP2152C1R	SNAP2162C1R	SNAP2152C1RTR	SNAP2162C1RTR
	White	SNAP2152C1W	SNAP2162C1W	SNAP2152C1WTR	SNAP2162C1WTR
 Both Faces Controlled	Black	SNAP2152C2BK	SNAP2162C2BK	SNAP2152C2BKTR	SNAP2162C2BKTR
	Blue	SNAP2152C2BL	SNAP2162C2BL	SNAP2152C2BLTR	SNAP2162C2BLTR
	Brown	SNAP2152C2	SNAP2162C2	SNAP2152C2TR	SNAP2162C2TR
	Gray	SNAP2152C2GY	SNAP2162C2GY	SNAP2152C2GYTR	SNAP2162C2GYTR
	Green	SNAP2152C2GN	SNAP2162C2GN	SNAP2152C2GNTR	SNAP2162C2GNTR
	Ivory	SNAP2152C2I	SNAP2162C2I	SNAP2152C2ITR	SNAP2162C2ITR
	Light Almond	SNAP2152C2LA	SNAP2162C2LA	SNAP2152C2LATR	SNAP2162C2LATR
	Red	SNAP2152C2R	SNAP2162C2R	SNAP2152C2RTR	SNAP2162C2RTR
	White	SNAP2152C2W	SNAP2162C2W	SNAP2152C2WTR	SNAP2162C2WTR



Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

Description	Wire Type	Catalog Number
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	Solid	SNAP1RA
	Stranded	SNAP2RA



Permanent Controlled Receptacle Label

Description	Catalog Number
For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling, 60 labels of each per pack.	CL60





Single Receptacles

Features and Benefits

- Single Receptacles are Available in Tamper-Resistant, Standard and Hospital Grade
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Articles: 406.4, 406.12).

SNAPConnect® Extra Heavy Duty Hospital Grade • Single Receptacles

BAA Compliant



Color	Hospital Grade •		Hospital Grade • Tamper-Resistant		
	15A 125V	20A 125V	15A 125V	20A 125V	
Almond	SNAP8210AL	SNAP8310AL	SNAP8210ALTR	SNAP8310ALTR	
Black	SNAP8210BK	SNAP8310BK	SNAP8210BKTR	SNAP8310BKTR	
Blue	SNAP8210BL	SNAP8310BL	SNAP8210BLTR	SNAP8310BLTR	
Brown	SNAP8210	SNAP8310	SNAP8210TR	SNAP8310TR	
Gray	SNAP8210GY	SNAP8310GY	SNAP8210GYTR	SNAP8310GYTR	
Ivory	SNAP8210I	SNAP8310I	SNAP8210ITR	SNAP8310ITR	
Light Almond	SNAP8210LA	SNAP8310LA	SNAP8210LATR	SNAP8310LATR	
Red	SNAP8210R	SNAP8310R	SNAP8210RTR	SNAP8310RTR	
White	SNAP8210W	SNAP8310W	SNAP8210WTR	SNAP8310WTR	

SNAPConnect® Extra Heavy Duty Standard Single Receptacles

BAA Compliant



Color	Standard Duplex		Standard Duplex Tamper-Resistant		
	15A 125V	20A 125V	15A 125V	20A 125V	
Almond	SNAP5261AL	SNAP5361AL	SNAP5261ALTR	SNAP5361ALTR	
Black	SNAP5261BK	SNAP5361BK	SNAP5261BKTR	SNAP5361BKTR	
Blue	SNAP5261BL	SNAP5361BL	SNAP5261BLTR	SNAP5361BLTR	
Brown	SNAP5261	SNAP5361	SNAP5261TR	SNAP5361TR	
Gray	SNAP5261GY	SNAP5361GY	SNAP5261GYTR	SNAP5361GYTR	
Ivory	SNAP5261I	SNAP5361I	SNAP5261ITR	SNAP5361ITR	
Light Almond	SNAP5261LA	SNAP5361LA	SNAP5261LATR	SNAP5361LATR	
Red	SNAP5261R	SNAP5361R	SNAP5261RTR	SNAP5361RTR	
White	SNAP5261W	SNAP5361W	SNAP5261WTR	SNAP5361WTR	

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

SNAPConnect® USB Charger Duplex Receptacles

Features and Benefits

- 3 Amps of USB Capacity
- Charge Multiple Portable Devices Simultaneously
- Green LED Indicator Lights when Charging
- Heavy Duty Stainless Steel USB Ports; Rated for Minimum 10,000 Cord Insertions and Removals
- Works with Standard SNAPConnect® Pigtailed Connector



Applications

- Universities
- Hotels
- Hospitals / Medical Labs
- Restaurants
- Airports
- Classrooms
- Residential

Designed for use with

- Apple® Products
- Digital Readers
- Tablet Computers
- Smart Phones
- MP3 Players
- GPS

This outlet is capable of delivering up to 3 Amps, 5V DC of USB power. If multiple portable devices are plugged in the individual ports will allocate power as determined by the portable devices. Suitable for use on circuits with AFCI and GFCI protection.

SNAPConnect® Extra Heavy Duty Duplex Receptacles Hospital Grade and Specification Grade



Color	Hospital Grade ● Tamper-Resistant		Specification Grade Tamper-Resistant	
	15A 125V	20A 125V	15A 125V	20A 125V
Black	SNAP8200USBBK	SNAP8300USBBK	SNAP15USBBK	SNAP20USBBK
Brown	SNAP8200USB	SNAP8300USB	SNAP15USB	SNAP20USB
Gray	SNAP8200USBGY	SNAP8300USBGY	SNAP15USBGY	SNAP20USBGY
Ivory	SNAP8200USBI	SNAP8300USBI	SNAP15USBI	SNAP20USBI
Light Almond	SNAP8200USBLA	SNAP8300USBLA	SNAP15USBLA	SNAP20USBLA
Red	SNAP8200USBR	SNAP8300USBR	—	—
White	SNAP8200USBW	SNAP8300USBW	SNAP15USBW	SNAP20USBW



Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

Description	Wire Type	Catalog Number
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	Solid	SNAP1RA
	Stranded	SNAP2RA



Heavy Duty Commercial Ground Fault Receptacles

Features and Benefits

- Attractive Flush Fit with Wallplate
- Shallow Box Depth - More Room for Wiring
- Assembled in USA
- Meets UL Federal Specification WC596
- TR/WR Versions Meet NEC® Code for Tamper and Weather Resistant
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM



Ground Fault Indicator's flashing Red LED indicates that the receptacle has lost capacity to provide protection and needs to be replaced



SNAPConnect® Heavy Duty Commercial Ground Fault Receptacles



Color	Hospital Grade ●		Specification Grade	
	15A 125V	20A 125V	15A 125V	20A 125V
Almond	GFRST82SNAPAL	GFRST83SNAPAL	GFRST15SNAPAL	GFRST20SNAPAL
Black	GFRST82SNAPBK	GFRST83SNAPBK	GFRST15SNAPBK	GFRST20SNAPBK
Brown	GFRST82SNAP	GFRST83SNAP	GFRST15SNAP	GFRST20SNAP
Gray	GFRST82SNAPGY	GFRST83SNAPGY	GFRST15SNAPGY	GFRST20SNAPGY
Ivory	GFRST82SNAPI	GFRST83SNAPI	GFRST15SNAPI	GFRST20SNAPI
Light Almond	GFRST82SNAPLA	GFRST83SNAPLA	GFRST15SNAPLA	GFRST20SNAPLA
Red	GFRST82SNAPR	GFRST83SNAPR	GFRST15SNAPR	GFRST20SNAPR
White	GFRST82SNAPW	GFRST83SNAPW	GFRST15SNAPW	GFRST20SNAPW

SNAPConnect® Heavy Duty Commercial Ground Fault Receptacles with Tamper-Resistant and Weather Resistant



Color	Hospital Grade ●		Specification Grade	
	15A 125V	20A 125V	15A 125V	20A 125V
Almond	GFTWRST82SNAPAL	GFTWRST83SNAPAL	GFTWRST15SNAPAL	GFTWRST20SNAPAL
Black	GFTWRST82SNAPBK	GFTWRST83SNAPBK	GFTWRST15SNAPBK	GFTWRST20SNAPBK
Brown	GFTWRST82SNAP	GFTWRST83SNAP	GFTWRST15SNAP	GFTWRST20SNAP
Gray	GFTWRST82SNAPGY	GFTWRST83SNAPGY	GFTWRST15SNAPGY	GFTWRST20SNAPGY
Ivory	GFTWRST82SNAPI	GFTWRST83SNAPI	GFTWRST15SNAPI	GFTWRST20SNAPI
Light Almond	GFTWRST82SNAPLA	GFTWRST83SNAPLA	GFTWRST15SNAPLA	GFTWRST20SNAPLA
Red	GFTWRST82SNAPR	GFTWRST83SNAPR	GFTWRST15SNAPR	GFTWRST20SNAPR
White	GFTWRST82SNAPW	GFTWRST83SNAPW	GFTWRST15SNAPW	GFTWRST20SNAPW



SNAP1RA


SNAPConnect® Right Angle Pigtailed Connector, 600V

Description	Wire Type	General Use	Assembled in USA
Clear right angle terminal with 6 inch leads #12 AWG	Solid	SNAP1RA	SNAP1RNA
THHN/THWN-2; Polycarbonate housing material.	Stranded	SNAP2RA	SNAP2RNA

Heavy Duty Specification Grade Surge Protection and Isolated Ground Receptacles

Features and Benefits

- Attractive Flush Fit with Wallplate
- Shallow Box Depth - More Room for Wiring
- IG Receptacles Meet UL Federal Specification WC596
- TR Versions Meet NEC® Code for Tamper-Resistant
- SNAPConnect® Eliminates Exposed Live Terminals on the Device

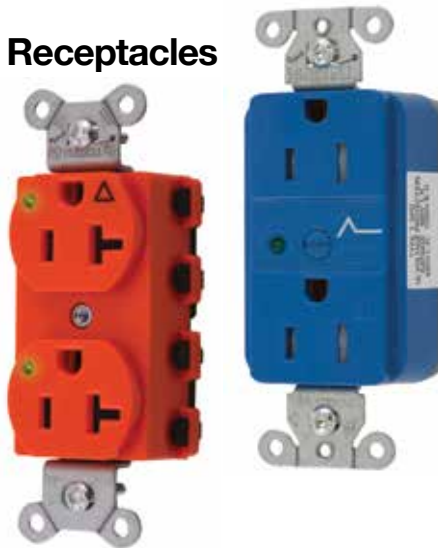

Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

SNAPConnect® TR Surge Protection Receptacle with Power Indicating LED



Color	Hospital Grade ●		Specification Grade	
	15A 125V	20A 125V	15A 125V	20A 125V
Blue	SNAP8262S	SNAP8362S	SNAP5262S	SNAP5362S
Gray	SNAP8262GYS	SNAP8362GYS	SNAP5262GYS	SNAP5362GYS
Ivory	SNAP8262IS	SNAP8362IS	SNAP5262IS	SNAP5362IS
Light Almond	SNAP8262LAS	SNAP8362LAS	SNAP5262LAS	SNAP5362LAS
Red	SNAP8262RS	SNAP8362RS	—	—
White	SNAP8262WS	SNAP8362WS	SNAP5262WS	SNAP5362WS



SNAP8362GYS SNAP5362S

SNAPConnect® Tamper-Resistant Isolated Ground Receptacle



Style	Color	Hospital Grade ●		Specification Grade	
		15A 125V	20A 125V	15A 125V	20A 125V
Duplex.	Orange	SNAP8200IGTR	SNAP8300IGTR	SNAP5262IGTRA	SNAP5362IGTRA
	Red	SNAP8200RIGTR	SNAP8300RIGTR	—	—
Style Line®/ decorator.	Orange	SNAP2172IGTR	SNAP2182IGTR	SNAP2152IGTRA	SNAP2162IGTRA
	Red	SNAP2172RIGTR	SNAP2182RIGTR	—	—



SNAP8300RIGTR SNAP2162IGTRA

SNAPConnect® Isolated Ground Receptacle with Power Indicating LED



Style	Color	Hospital Grade ●		Specification Grade	
		15A 125V	20A 125V	15A 125V	20A 125V
Duplex.	Orange	SNAP8200IGL	SNAP8300IGL	SNAP5262IGL	SNAP5362IGL
	Red	SNAP8200RIGL	SNAP8300RIGL	—	—
Style Line®/ decorator.	Orange	SNAP2172IGL	SNAP2182IGL	SNAP2152IGL	SNAP2162IGL
	Red	SNAP2172RIGL	SNAP2182RIGL	—	—



SNAP2172RIGLTRA SNAP2162IGLTRA

SNAPConnect® TR Isolated Ground Receptacle with Power Indicating LED



Style	Color	Hospital Grade ●		Specification Grade	
		15A 125V	20A 125V	15A 125V	20A 125V
Duplex.	Orange	SNAP8200IGLTR	SNAP8300IGLTR	SNAP5262IGLTRA	SNAP5362IGLTRA
	Red	SNAP8200RIGLTR	SNAP8300RIGLTR	—	—
Style Line®/ decorator.	Orange	SNAP2172IGLTR	SNAP2182IGLTR	SNAP2152IGLTRA	SNAP2162IGLTRA
	Red	SNAP2172RIGLTR	SNAP2182RIGLTR	—	—

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.





Specification Grade Toggle Series Switches


Features and Benefits

- Abuse Resistant Nylon Toggle for Heavy Use Applications
- Stainless Steel Autoground
- Incorporates LED Technology for Illuminated and Pilot Light
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly



SNAPConnect® Specification Grade Toggle Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
SNAPConnect nylon toggle.	Black	SNAP1201BKNA	SNAP1203BKNA	SNAP1221BKNA	SNAP1223BKNA
	Brown	SNAP1201BRNA	SNAP1203BRNA	SNAP1221BRNA	SNAP1223BRNA
	Gray	SNAP1201GYNA	SNAP1203GYNA	SNAP1221GYNA	SNAP1223GYNA
	Ivory	SNAP1201INA	SNAP1203INA	SNAP1221INA	SNAP1223INA
	Light Almond	SNAP1201LANA	SNAP1203LANA	SNAP1221LANA	SNAP1223LANA
	Red	SNAP1201RNA	SNAP1203RNA	SNAP1221RNA	SNAP1223RNA
	White	SNAP1201WNA	SNAP1203WNA	SNAP1221WNA	SNAP1223WNA



SNAP1201INA

SNAPConnect® Specification Grade Illuminated Toggle Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Illuminated Blue LED, light ON with load OFF, toggle.	Black	SNAP1201ILBKNA	—	SNAP1221ILBKNA	—
	Ivory	SNAP1201ILINA	—	SNAP1221ILINA	—
	Red	SNAP1201ILRNA	—	SNAP1221ILRNA	—
	White	SNAP1201ILWNA	—	SNAP1221ILWNA	—



SNAP1221ILWNA

SNAPConnect® Specification Grade Pilot Light Toggle Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Pilot Red LED, light ON with load ON, toggle.	Black	SNAP1201PLBKNA	—	SNAP1221PLBKNA	—
	Ivory	SNAP1201PLINA	—	SNAP1221PLINA	—
	Red	SNAP1201PLRNA	—	SNAP1221PLRNA	—
	White	SNAP1201PLWNA	—	SNAP1221PLWNA	—



SNAP1201PLINA

SNAPConnect® Jumper/Tester

Description	20A, 120-277V AC	
	Single Pole	Three Way
Jumper/Tester, Black toggle, Blue LED indicator.	SNAPSWJUMP	SNAP3WJUMP



SNAPSWJUMP

SNAPConnect® Switch Pigtailed Connector

Description	Wire Type	20A, 120-277V AC		
		Single Pole (3 Wires)	Single Pole with Pilot	3 Way (4 Wires)
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid	SNAPSP1NA	SNAPSPP1NA	SNAP3W1NA
		SNAPSP1NAM2	SNAPSPP1NAM2	SNAP3W1NAM2
	Stranded	SNAPSP2NA	SNAPSPP2NA	SNAP3W2NA
		SNAPSP2NAM2	SNAPSPP2NAM2	SNAP3W2NAM2



Specification Grade Decorator Series Switches

Features and Benefits

- Abuse Resistant Thermoplastic Rocker for Heavy Use Applications
- Stainless Steel Autoground
- Incorporates LED Technology for Illuminated and Pilot Light
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly

SNAPConnect® Specification Grade Style Line® Decorator Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
SNAPConnect rocker.	Black	SNAP2101BKNA	SNAP2103BKNA	SNAP2121BKNA	SNAP2123BKNA
	Brown	SNAP2101BRNA	SNAP2103BRNA	SNAP2121BRNA	SNAP2123BRNA
	Gray	SNAP2101GYNA	SNAP2103GYNA	SNAP2121GYNA	SNAP2123GYNA
	Ivory	SNAP2101INA	SNAP2103INA	SNAP2121INA	SNAP2123INA
	Light Almond	SNAP2101LANA	SNAP2103LANA	SNAP2121LANA	SNAP2123LANA
	Red	SNAP2101RNA	SNAP2103RNA	SNAP2121RNA	SNAP2123RNA
	White	SNAP2101WNA	SNAP2103WNA	SNAP2121WNA	SNAP2123WNA



SNAP2101INA

SNAPConnect® Specification Grade Illuminated Style Line® Decorator Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Illuminated Blue LED, light ON with load OFF, rocker.	Black	SNAP2101ILBKNA	SNAP2103ILBKNA	SNAP2121ILBKNA	SNAP2123ILBKNA
	Ivory	SNAP2101ILINA	SNAP2103ILINA	SNAP2121ILINA	SNAP2123ILINA
	Red	SNAP2101ILRNA	SNAP2103ILRNA	SNAP2121ILRNA	SNAP2123ILRNA
	White	SNAP2101ILWNA	SNAP2103ILWNA	SNAP2121ILWNA	SNAP2123ILWNA



SNAP2103ILWNA

SNAPConnect® Specification Grade Pilot Light Style Line® Decorator Series

Description	Toggle Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Pilot Red LED, light ON with load ON, rocker.	Black	SNAP2101PLBKNA	—	SNAP2121PLBKNA	—
	Ivory	SNAP2101PLINA	—	SNAP2121PLINA	—
	Red	SNAP2101PLRNA	—	SNAP2121PLRNA	—
	White	SNAP2101PLWNA	—	SNAP2121PLWNA	—



SNAP2121PLINA

SNAPConnect® Switch Pigtailed Connector

Description	Wire Type	Single Pole		
		(3 Wires)	with Pilot	3 Way (4 Wires)
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid	SNAPSP1NA SNAPSP1NAM2	SNAPSPP1NA SNAPSPP1NAM2	SNAP3W1NA SNAP3W1NAM2
	Stranded	SNAPSP2NA SNAPSP2NAM2	SNAPSPP2NA SNAPSPP2NAM2	SNAP3W2NA SNAP3W2NAM2



Healthcare and Education Product Solutions



Hubbell's in-depth virtual tours are designed to graphically and innovatively demonstrate where and how Hubbell's full line of wiring devices for power, data, voice and multimedia are deployed.

Hubbell Education Facilities eTour

This virtual tour of an education campus encompasses many different buildings and unique spaces. There are over 140 Hubbell product application solutions demonstrated throughout.



Hubbell Healthcare eTour

Users can navigate their way through nine specific areas of a virtual hospital. There are 20 unique spaces where Hubbell product solutions are identified at work.

Available Literature

Hubbell offers an extensive literature library for product support. Downloadable PDFs are available on line.



Education Application Guide



Healthcare Application Guide



Installation Efficiency Guide



Entertainment Product Solution Guide