Llegrand

ULTRASONIC DUAL RELAY WALL SWITCH OCCUPANCY SENSOR

High sensitivity for exceptional performance

Two relays for control of two separate lighting loads or circuits

Low profile design



Selectable operation, walk-through, test and presentation modes for increased energy savings and convenience

Defaults to Auto-ON to 50% operation for maximum energy savings

Part of a comprehensive line of PIR, Ultrasonic and Dual Technology wall switch sensors



Description

The UW-200 ultrasonic wall switch sensor turns lights ON and OFF based on occupancy. It contains two relays for controlling two independent lighting loads or circuits and a variety of features.

Operation

The UW-200 fits in a single gang junction box. Each of the UW-200's relays can control a separate lighting load. It uses high frequency (40kHz) ultrasound to detect occupancy and turn the first relay ON. Once the space is vacated and the time delay elapses, lights automatically turn OFF. Dual ON/OFF buttons allow the user to manually turn on and off each of the loads. DIP switch settings allow for a variety of control options such as Manual-ON or Auto-ON for each relay, walk-through and test modes.

Features

- Complies with 2011 NEC requirements
- Detection Signature Processing eliminates false triggers and provides immunity to RFI and EMI
- Zero-crossing on both relays for long relay life
- Choice of Manual-ON or Auto-ON operation, selectable for each relay
- Selectable walk-through mode turns lights off three minutes after the room is initially occupied if no motion is detected after the first 30 seconds
- Test mode allows quick and easy adjustments

Bi-Level Control

The UW-200 features a built-in light level sensor that controls the second (secondary) relay. If adequate daylight is present, the sensor will hold secondary lights off until daylight levels drop, providing increased energy savings. The UW-200 satisfies energy codes requiring bi-level or daylight control switching. The two relays in the sensor give it the ability to control two lighting loads independently. This provides A/B switching where the user can achieve half-lighting (or another desired portion) from a single switch.

Applications

The UW-200 sensor is ideal for applications where the sensor may have a partially obstructed line of sight of the occupant. In addition, its dual relays allow bi-level switching or control of a secondary load such as an exhaust fan. Common applications include individual restrooms, restrooms with two stalls and utility/storage rooms.

- Selectable audible and/or visual alerts for impending shutoff
- In automatic mode, sensor returns automatically to Auto-ON after lights are turned off manually; ideal for presentations
- LED indicates occupancy detection
- Optional light level sensing with simple setup
- Service mode allows sensor to operate as a service switch in the unlikely event of a failure
- Sensor coverage tested to NEMA Guide Publication WD 7-2000
- Compatible with decorator wall plates

PROJECT	LOCATION/ TYPE	
---------	-------------------	--


Specifications




- 120/277 VAC; 50/60 Hz • @ 120 VAC, 0-800 W ballast or tungsten, 1/6 hp @ 277 VAC, 0-1200 W ballast
- Time delays: 5, 10, 15, 20, 25 or 30 minutes, walk-through, • test-mode
- Coverage: Major motion 20' x 20' • Minor motion 15' x 15'

Controls & Settings


- Sensitivity adjustment: Ultrasonic (fully variable)
- Dimensions: 2.73" x 1.76" x 1.83" (69.3mm x 44.7mm x 46.5mm) L x W x D
- UL and cUL listed
- Five year warranty

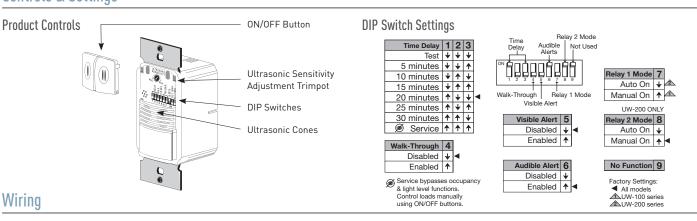

UW-200 Bi-level Wiring

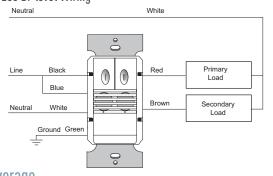


UW-200 Two Circuit Wiring Neutral

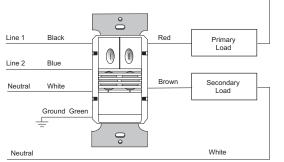

White

Coverage

Coverage Pattern For best performance, Wattstopper

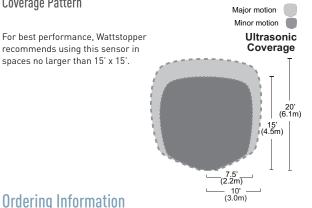

Ordering Information

Catalog #	Color	Voltage	Load Rating
UW-200-W	White	120/277 VAC; 50/60 Hz	@ 120 VAC, 0-800 W ballast or tungsten,1/6 hp @ 277 VAC, 0-1200 W ballast
UW-200-LA	Lt. Almond		
UW-200-I	lvory		
UW-200-G	Gray		
UW-200-B	Black		

Order wall plate separately.