


Product type designation

Product description

PROFIBUS FC Standard Cable GP

Standard bus cable (2 wires), preferred length, not assembled
 PROFIBUS FC Standard, bus cable 2-wire, shielded special
 configuration for Quick assembly 500 m

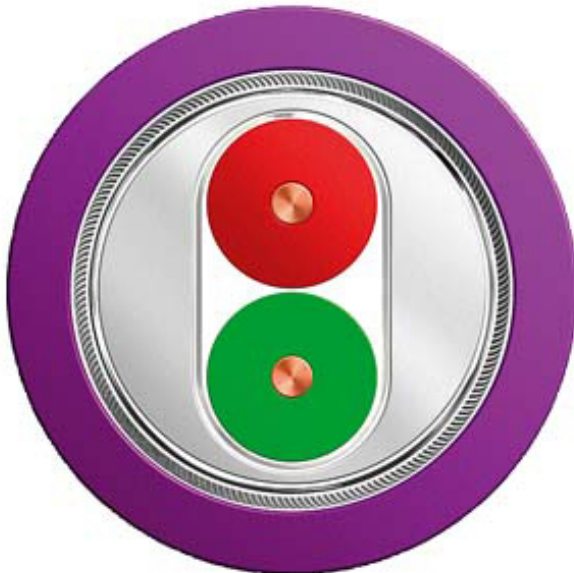

Suitability for use	Standard cable specially designed for fast, permanent installation
Cable designation	02YSY (ST) CY 1x2x0,64/2,55-150 VI KF 40 FR
Wire length	500 m

Electrical data

Damping ratio per length	
<ul style="list-style-type: none"> • at 9.6 kHz / maximum • at 38.4 kHz / maximum • at 4 MHz / maximum • at 16 MHz / maximum 	0.0025 dB/m 0.004 dB/m 0.022 dB/m 0.042 dB/m
Impedance	
<ul style="list-style-type: none"> • Rated value • at 9.6 kHz • at 38.4 kHz • at 3 MHz ... 20 MHz 	150 Ω 270 Ω 185 Ω 150 Ω
Relative symmetrical tolerance	
<ul style="list-style-type: none"> • of the characteristic impedance at 9.6 kHz • of the characteristic impedance at 38.4 kHz 	10 % 10 %

<ul style="list-style-type: none"> • of the characteristic impedance at 3 MHz ... 20 MHz 	10 %
Loop resistance per length / maximum	110 mΩ/m
Shield resistance per length / maximum	9.5 Ω/km
Capacity per length / at 1 kHz	28.5 pF/m
Operating voltage	
<ul style="list-style-type: none"> • RMS value 	100 V

Mechanical data

Number of electrical cores	2
Design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
Type of electrical connection / FastConnect	Yes
Outer diameter	
<ul style="list-style-type: none"> • of inner conductor 	0.65 mm
<ul style="list-style-type: none"> • of the wire insulation 	2.55 mm
<ul style="list-style-type: none"> • of the inner sheath of the cable 	5.4 mm
<ul style="list-style-type: none"> • of cable sheath 	8 mm
Symmetrical tolerance of the outer diameter / of cable sheath	0.4 mm
Material	
<ul style="list-style-type: none"> • of the wire insulation 	polyethylene (PE)
<ul style="list-style-type: none"> • of the inner sheath of the cable 	PVC
<ul style="list-style-type: none"> • of cable sheath 	PVC
Color	
<ul style="list-style-type: none"> • of the insulation of data wires 	red/green
<ul style="list-style-type: none"> • of cable sheath 	Violet
Bending radius	
<ul style="list-style-type: none"> • with single bend / minimum permissible 	37.5 mm
<ul style="list-style-type: none"> • with multiple bends / minimum permissible 	75 mm
Tensile load / maximum	100 N
Weight per length	78 kg/km

Ambient conditions

Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-40 ... +75 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +75 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +75 °C
<ul style="list-style-type: none"> • during installation 	-40 ... +75 °C
<ul style="list-style-type: none"> • Note 	Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
Burning behavior	flame resistant according to IEC 60332-3-24 (Category C) and UL 1685 (CSA FT 4)

Class of burning behaviour / according to EN 13501-6	Eca
Chemical resistance <ul style="list-style-type: none"> • to mineral oil • to grease • to water 	oil resistant according to IEC 60811-2-1 (4 h / 70°C) Conditional resistance conditional resistance
Radiological resistance / to UV radiation	resistant

Product features, product functions, product components / general

Product feature <ul style="list-style-type: none"> • halogen-free • silicon-free 	No Yes
--	-----------

Standards, specifications, approvals

UL/ETL listing / 300 V Rating	Yes; c(ETL)us, CMG / (ETL)us CL3 / Sun Res
UL/ETL style / 600 V Rating	Yes; cRUus AWM 21694 AWM I A/B 60°C 600V FT2
Certificate of suitability <ul style="list-style-type: none"> • CE marking • UL approval • RoHS conformity 	Yes Yes Yes
Marine classification association <ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • Bureau Veritas (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	No No No No No No No

Further information / Internet-Links

Internet-Link <ul style="list-style-type: none"> • to website: Selector SIMATIC NET SELECTION TOOL • to website: Industrial communication • to website: Industry Mall • to website: Information and Download Center • to website: Image database • to website: CAx Download Manager • to website: Industry Online Support 	http://www.siemens.com/snst http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
--	---

last modified: 10/26/2019